

## Data Flow System

**Document Title:** **VISTA Infra Red Camera Calibration Plan**

**Document Number:** **VIS-SPE-IOA-20000-0002**

**Issue:** **1.3**

**Date:** **2006-09-28**

<b>Document Prepared by:</b>	<b>Peter Bunclark &amp; Simon Hodgkin</b> (CASU)	<b>Signature And date:</b>	
<b>Document Approved by:</b>	<b>Mike Irwin</b> (CASU Manager)	<b>Signature And date:</b>	
<b>Document Reviewed by:</b>	<b>William Sutherland</b> (VISTA Project Scientist)	<b>Signature And date:</b>	
<b>Document Released by:</b>	<b>Jim Emerson</b> (VDFS Project leader)	<b>Signature And date:</b>	

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	2 of 71

## Change Record

<b>Issue</b>	<b>Date</b>	<b>Sections</b>	<b>Remarks</b>
0.5	2004-04-08	All	New Document
1.0	2004-12-15	All	FDR release
1.1	2005-05-03	All	post-FDR revision
1.2	2005-05-11	All	Final FDR fixes
1.3	2006-09-28	All	Rework of photometry reflecting WFCAM experience, procedure changes following pipeline prototyping, hardware references following actual build details.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	3 of 71

## Notification List

The following people should be notified by email that a new issue of this document is available.

IoA:	W Sutherland
RAL:	G Dalton
QMUL	J Emerson
ATC	Malcolm Stewart Steven Beard

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	4 of 71

## Table of Contents

Change Record.....	2
Notification List.....	3
Table of Figures.....	6
1 Introduction.....	7
1.1 Purpose.....	7
1.2 Scope.....	7
1.3 Applicable Documents.....	7
1.4 Reference Documents.....	8
1.5 Abbreviations and Acronyms.....	8
1.6 Glossary.....	9
2 Overview.....	11
2.1 Hardware.....	11
2.2 Observing Modes.....	14
2.2.1 Imaging Mode Description.....	14
2.2.2 Calibrations.....	14
2.2.3 High Order Wave Front Sensor (HOWFS) Mode.....	14
2.2.4 Calibrations.....	15
2.3 Pipeline.....	15
2.4 Operation.....	15
3 Calibration Accuracy.....	17
3.1 Overview.....	17
3.2 Astrometric Error.....	17
3.3 Photometric Error.....	17
3.3.1 RMS.....	18
3.3.2 Additive systematics.....	18
3.3.3 Multiplicative systematics.....	18
3.3.4 Extinction monitoring.....	19
4 Calibration Data for Instrumental Signature Removal.....	20
4.1 Purpose.....	20
4.2 Reset Frames.....	22
4.3 Dark Frames.....	22
4.4 Dome flats.....	23
4.5 Detector Noise.....	24
4.6 Linearization Measurements.....	24
4.7 Twilight Flats.....	25
4.8 Illumination Correction Measurement.....	26
4.9 Image Persistence Measurements.....	27
4.10 Electrical Cross-Talk Measurements.....	27
5 Data for Photometric Calibration.....	29
5.1 Introduction.....	29
5.2 Calibration from 2MASS.....	29
5.3 Calibration from Standard Star Fields.....	29
5.4 Standard Fields.....	31
6 Calibration Data Derived from Science Data.....	32
6.1 For Instrument Signature Removal.....	32

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	5 of 71

6.1.1	Night-Sky Maps .....	32
6.1.2	Sky Subtraction and Fringe Removal .....	32
6.1.3	Jittering .....	33
6.1.4	Microstepping .....	34
6.2	For Astrometric Calibration .....	34
6.2.1	Optical Distortion Effects .....	34
6.2.2	Final WCS Fit .....	35
7	Quality Control .....	37
7.1	Further Quality Control Data Derived from Science Frames .....	37
7.1.1	Object Extraction .....	37
7.2	On line quality control (QC-0).....	37
7.3	Quality Control Parameters.....	38
8	Templates .....	42
8.1	Imaging Calibration Templates.....	46
8.1.1	Reset.....	46
8.1.2	Dark.....	46
8.1.3	Dark Current .....	46
8.1.4	Acquire Dome Screen .....	46
8.1.5	Dome Flat.....	46
8.1.6	Detector Linearity .....	47
8.1.7	Noise and Gain.....	47
8.1.8	Acquire Twilight Field.....	47
8.1.9	Twilight Flat.....	48
8.1.10	Persistence.....	48
8.1.11	Astrometric Calibration .....	49
8.1.12	Photometric Calibration Standard Fields .....	49
8.1.13	Quick look.....	49
8.1.14	Cross-talk .....	49
8.1.15	Illumination.....	50
8.2	HOWFS mode calibration.....	50
8.2.1	HOWFS Acquire Dome Screen .....	50
8.2.2	HOWFS Reset.....	50
8.2.3	HOWFS Dark.....	51
8.2.4	HOWFS Dome Flat.....	51
8.3	Imaging Mode Science Templates .....	51
8.3.1	Acquire.....	51
8.3.2	Observe Paw .....	52
8.3.3	Observe Tile.....	53
8.3.4	Observe Offsets.....	54
8.3.5	Observing a set of Tiles .....	54
8.4	HOWFS mode data .....	55
8.4.1	HOWFS Acquire.....	55
8.4.2	HOWFS Wave front .....	55
8.4.3	HOWFS Expose.....	55
8.5	Instrument Health Templates .....	56
9	Technical Programs .....	57
9.1	TP-VIS1: Establishment of Secondary Standard Fields .....	57
10	Format of Data Frames .....	59

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	6 of 71

10.1	Principle .....	59
10.2	Model FITS header .....	59
Appendix A.	2MASS calibration Fields.....	70
11	Index .....	71

## Table of Figures

Figure 2-1	VISTA Focal plane: Each of the 4 groups of detectors in the Y direction (e.g. #s 1-4, 5-8, 9-12, 13-16) is read out by a separate IRACE controller. ....	11
Figure 2-2	VISTA Engineering Pawprint. ....	12
Figure 2-3	Filter Transmission Curves for Reference Samples of Y, J, H, and K <sub>s</sub> bands. ....	13
Figure 4-1	Cascade Diagram for producing Calibration Frames.....	21
Figure 8-1	Hierarchy of VISTA IR Camera Templates.....	42
Figure 8-3	Pre-selected twilight fields.....	48
Figure 9-1	Distribution of the 2MASS touchstone fields on the sky.....	57
Table 10-1	FITS Example Header .....	69

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	7 of 71

## 1 Introduction

### 1.1 Purpose

This document forms part of the package of documents describing the Data Flow System for VISTA, the Visible and Infrared Telescope for Astronomy. As stated in [AD1] “The Calibration Plan is the prime document which describes the different instrument-specific components of the Data Flow System”.

### 1.2 Scope

This document describes the VISTA DFS calibration plan for the output from the 16 Raytheon VIRGO IR detectors in the (Infra Red) camera for VISTA. The baseline requirements for calibration are included in the VISTA DFS Impact Document [AD2]. The major reduction recipes and algorithms to be applied to the data are described in the VISTA DFS Data Reduction Library Design [RD1].

Each camera exposure will produce a ‘pawprint’ consisting of 16 non-contiguous images of the sky, one from each detector. The VISTA pipeline will remove instrumental artefacts, combine the pawprint component exposures offset by small jitters, and photometrically and astrometrically calibrate each pawprint. It will also provide Quality Control measures. It will not combine multiple adjacent pawprints into contiguous filled images, nor stack multiple pawprints at the same sky position.

This document does not describe any calibrations or procedures relating to the CCD detectors that are also located within the camera and which interact with the Telescope Control System.

This document covers only the Routine Phase of operations of VISTA’s IR Camera. In particular it does not describe any calibrations or procedures that form part of the Commissioning Plan for VISTA, nor any procedures needed during routine Engineering Maintenance. [Except for HOWFS observations, which are made using the science detectors, and passed to the science archive.] Arrangements for processing any calibrations or procedures carried out under such categories are the responsibility of the VISTA Project Office.

### 1.3 Applicable Documents

The following documents, of the exact issue shown, form part of this document to the extent specified herein. In the event of conflict between the documents referenced herein and the contents of this document, the contents of this document shall be considered as a superseding requirement.

[AD1] *Data Flow for the VLT/VLTI Instruments Deliverables Specification*, VLT-SPE-ESO-19000-1618, issue 2.0, 2004-05-22.

[AD2] *VISTA Infra Red Camera DFS Impact*, VIS-SPE-IOA-20000-00001, issue 1.3, 2005-12-25.

[AD3] *VISTA Infrared Camera Data Flow System PDR RID Responses with PDR Panel Disposition*, VIS-TRE-IOA-20000-0006 issue 1.0

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	8 of 71

[AD4] *VISTA Infrared Camera Data Flow System FDR RID Responses* VIS-TRE-IOA-20000-0013 issue 1.0 2005-12-25

## 1.4 Reference Documents

The following documents are referenced in this document.

- [RD1] *VISTA Infra Red Camera Data Reduction Library Design*, VIS-SPE-IOA-20000-0010, issue 1.3, 2006-01-31.
- [RD2] *Data Interface Control Document*, GEN-SPE-ESO-19940-794, issue 3, 2005-02-01.
- [RD3] *VISTA Operational Concept Definition Document*, VIS-SPE-VSC-00000-0002 issue 1.0, 2001-03-28
- [RD4] *VISTA Infrared Camera Technical Specification*, VIS-SPE-ATC-06000-0004, issue 2.0, 2003-11-20
- [RD5] *VISTA IR Camera Software Functional Specification*, VIS-DES-ATC-06081-00001, issue 2.0, 2003-11-12.
- [RD6] *IR Camera Observation Software Design Description*, VIS-DES-ATC-06084-0001, issue 3.2, 2005-02-24.
- [RD7] *VISTA Science Requirements Document*, VIS-SPE-VSC-00000-0001, issue 2.0, 2000-10-26
- [RD8] *A Global Photometric Analysis of 2MASS Calibration Data*, Nikolaev et al., *Astron. J.* **120**, 3340-3350, 2000
- [RD9] *2MASS Calibration Scan Working Databases and Atlas Images*, [http://www.ipac.caltech.edu/2mass/releases/allsky/doc/seca4\\_1.html](http://www.ipac.caltech.edu/2mass/releases/allsky/doc/seca4_1.html)
- [RD10] *A New System of Faint Near-Infrared Standard Stars*, Persson et al., *Astrophys. J.* **116**, 2475-2488, 1998
- [RD11] *JHK standard stars for large telescopes: the UKIRT Fundamental and Extended lists*, Hawarden et al., *Mon.Not.R.Soc.* **325**, 563-574, 2001
- [RD12] *The FITS image extension*, Ponz et al, *Astron. Astrophys. Suppl. Ser.* **105**, 53-55, 1994
- [RD13] *Representations of world coordinates in FITS*, Griesen, & Calabretta, *A&A*, **395**, 1061.2002
- [RD14] *Representations of celestial coordinates in FITS*, Calabretta & Griesen, *A&A*, **395**, 1077, 2002
- [RD15] *Overview of VISTA IR Camera Data Interface Dictionaries*, VIS-SPE-IOA-20000-0004, 0.1, 2003-11-13
- [RD16] *Northern JHK Standard Stars fro Array Detectors*, Hunt et al *Astr.J* **115**, 2594, 1998

## 1.5 Abbreviations and Acronyms

2MASS	2 Micron All Sky Survey
CDS	Correlated Double Sampling
DAS	Data Acquisition System
DFS	Data Flow System
FITS	Flexible Image Transport System
HOWFS	High Order Wave-Front Sensor
ICRF	International Coordinate Reference Frame



<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	9 of 71

IMPEX	Import Export (P2PP ASCII files)
IR	Infra Red
IWS	Instrument Workstation
LOWFS	Low Order Wave-Front Sensor
OB	Observation Block
OS	Observing System
OT	Observing Tool
PI	Principal Investigator
QC-0	Quality Control, level zero
QC-1	Quality Control, level one
SDT	Survey Definition Tool
TCS	Telescope Control System
URD	User Requirements Document
VDFS	VISTA Data Flow System
VIRCAM	VISTA Infra Red Camera
VISTA	Visible and Infrared Survey Telescope for Astronomy
VPO	VISTA Project Office
WCS	World Coordinate System
WFCAM	Wide Field Camera (on UKIRT)
ZPN	Zenithal Polynomial

## 1.6 Glossary

<b>Confidence Map</b>	An integer array, normalized to a median of 100% which is associated with an image. Combined with an estimate of the sky background variance of the image it assigns a relative weight to each pixel in the image and automatically factors in an exposure map. Bad pixels are assigned a value of 0, 100% has the value 100, and the maximum possible is 32767 (negative values are reserved for future upgrades). The background variance value is stored in the FITS header. It is especially important in image filtering, mosaicing and stacking.
<b>DIT</b>	Digital Integration Time. Separate readouts are summed digitally.
<b>Exposure</b>	The stored product of many individual <b>integrations</b> that have been co-added in the DAS. Each exposure is associated with an exposure time.
<b>Integration</b>	A simple snapshot, within the DAS, of a specified elapsed time <b>DIT</b> seconds. This elapsed time is known as the integration time.
<b>Jitter (pattern)</b>	A pattern of <b>exposures</b> at positions each shifted by a small <b>movement</b> (<30 arcsec) from the reference position. Unlike a <b>microstep</b> the non-integral part of the shifts is any fractional number of pixels. Each position of a jitter pattern can contain a <b>microstep</b> pattern.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	10 of 71

- Mesostep** A sequence of **exposures** designed to completely sample across the face of the detectors in medium-sized steps to monitor residual systematics in the photometry.
- Microstep (pattern)** A pattern of **exposures** at positions each shifted by a very small **movement** (<3 arcsec) from the reference position. Unlike a **jitter** the non-integral part of the shifts are specified as 0.5 of a pixel, which allows the pixels in the series to be interleaved in an effort to increase sampling. A microstep pattern can be contained within each position of a **jitter** pattern.
- Movement** A change of position of the telescope that is not large enough to require a new guide star.
- Offset** A change of position of the telescope that is not large enough to require a telescope **preset**, but is large enough to require a new guide star.
- Pawprint** The 16 non-contiguous images of the sky produced by the VISTA IR camera, with its 16 non-contiguous chips (see Figure 2-2). The name is from the similarity to the prints made by the padded paw of an animal (the analogy suits earlier 4-chip cameras better).
- Preset** A telescope slew to a new position involving a reconfiguration of the telescope control system and extra housekeeping operations that are not necessary for a **movement** or an **offset**.
- Tile** A filled area of sky fully sampled (filling in the gaps in a pawprint) by combining multiple **pawprints**. Because of the detector spacing the minimum number of pointed observations (with fixed offsets) required for reasonably uniform coverage is 6, which would expose each piece of sky, away from the edges of the tile, to at least 2 camera pixels. The pipeline does not combine **pawprints** into tiles.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	11 of 71

## 2 Overview

### 2.1 Hardware

VISTA is a wide field alt-az telescope designed for a single purpose, surveys, and which does not have a conventional focus. It can only be used with a purpose built camera, and is delivered with an IR camera. Thus it is the performance and pointing of the telescope-camera system that is important.

The telescope by itself has no capability to lock onto a guide star or carry out wave front sensing. The IR Camera therefore contains, as well as 16 IR detectors, two Autoguiders CCDs and two low order wave front sensor (LOWFS) units, each with two CCDs, operating in the I band, as shown in Fig 2-1. Two autoguiders, on opposite

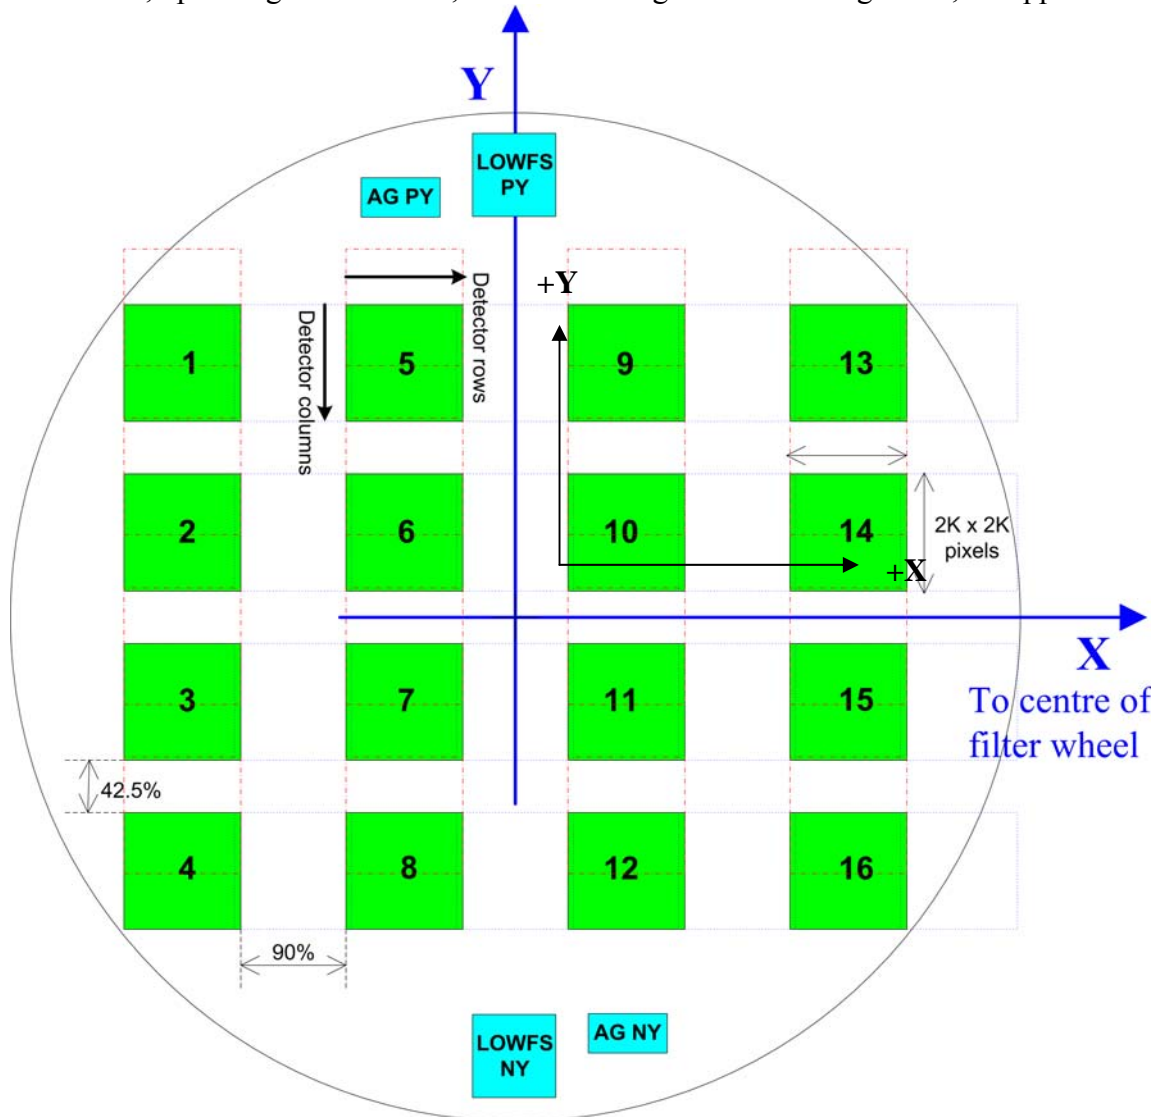


Figure 2-1 VISTA Focal plane: Each of the 4 groups of detectors in the Y direction (e.g. #s 1-4, 5-8, 9-12, 13-16) is read out by a separate IRACE controller.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	12 of 71

edges of the focal plane, are used in order to meet the sky coverage requirements, although only one is allowed to apply corrections to the telescope axes at any given time. The LOWFSs measure aberrations that are used by the external active optics control process to adjust the position of the 5 axis (x, y, z, tip, tilt) secondary mirror support system and some aspects of the M1 surface to maintain image quality. The LOWFS operates roughly every 1 minute during tracking and needs exposures of ~40 sec to average out seeing effects. Although the Autoguiders and LOWFSs are physically located within the IR camera, both are considered part of the TCS from a software point of view. This is primarily to maintain consistency with existing VLT software and standards. The VISTA pipeline receives no data from these CCDs. The

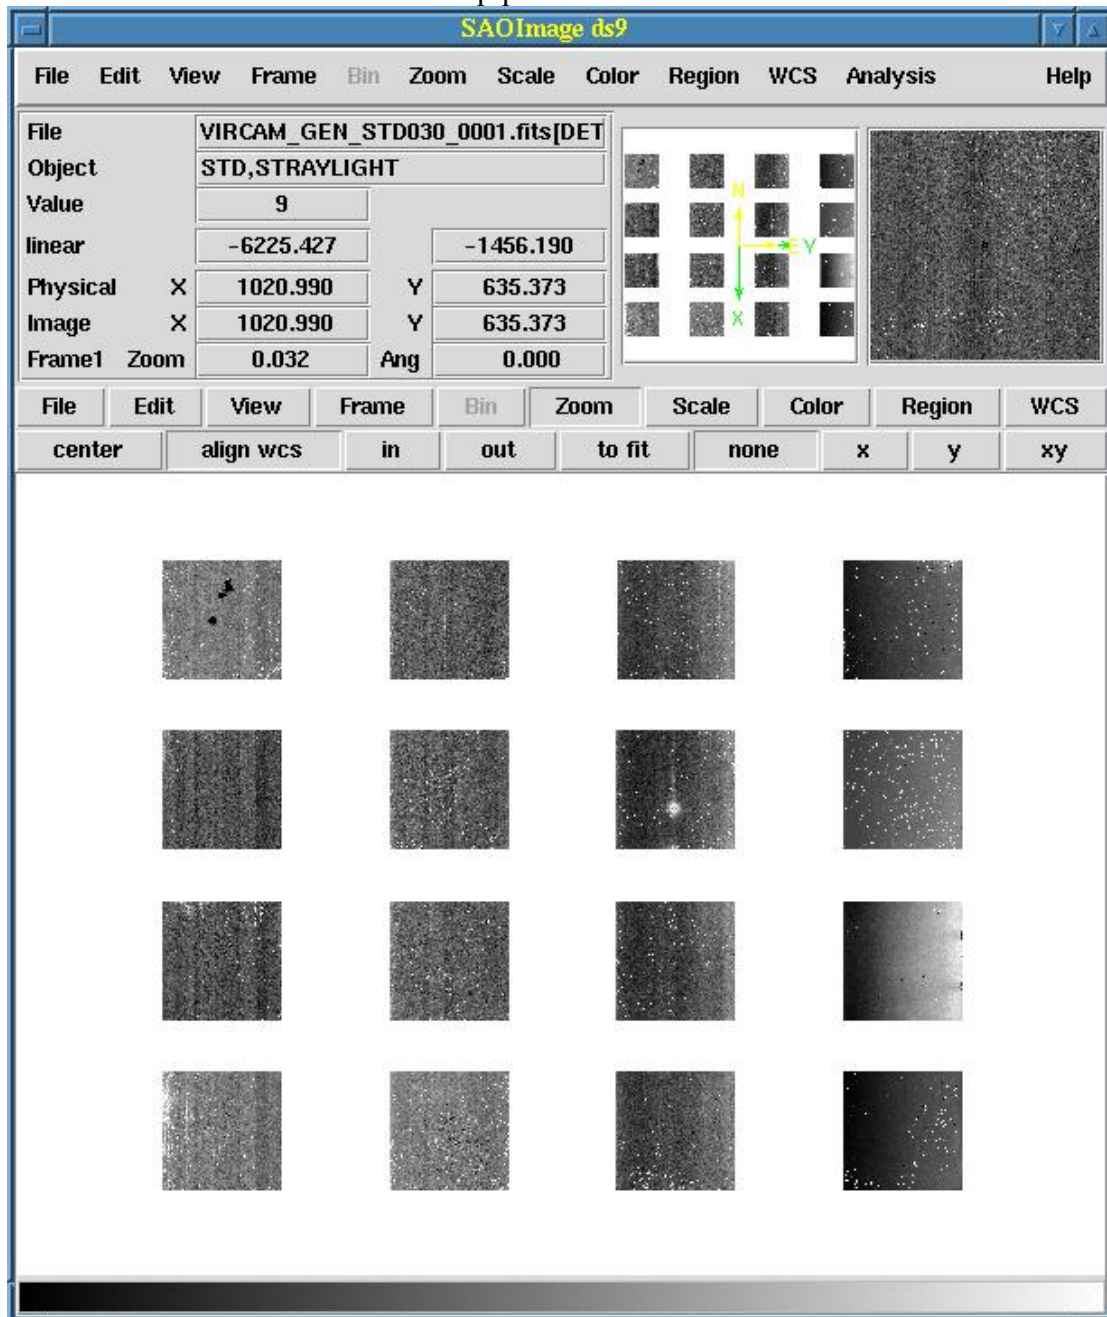


Figure 2-2 VISTA Engineering Pawprint.


<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	13 of 71

CCDs therefore do not impact on the VISTA pipeline, except in so far as the pointing and image quality of the camera are dependent on their proper operation.

A high order wave front (curvature) sensor (HOWFS) uses some of the science detectors to determine occasional adjustments to the primary mirror support system. (This is done perhaps once at the start of the night and once around midnight.) Processing the signals from the HOWFS is done within the Instrument Workstation, and so the pipeline will not have to deal with the HOWFS at all. However all data from the IR detectors, including HOWFS data, is passed to the science archive, so the necessary calibration templates for the HOWFS are covered here.

Within the IR Camera are 16 Raytheon 2048x2048 VIRGO detectors arranged in a sparse array. Each camera exposure produces a pawprint consisting of 16 non-contiguous images of the sky. An example display of a complete FITS file consisting of a VISTA “pawprint” is shown in Figure 2-2.

The VISTA IR camera has only one moving part, the filter wheel which has 8 filter holders, each filter holder containing 16 filters, one for each IR detector. There are further auxiliary (beam splitting) filters for use with the high order wave front sensor.

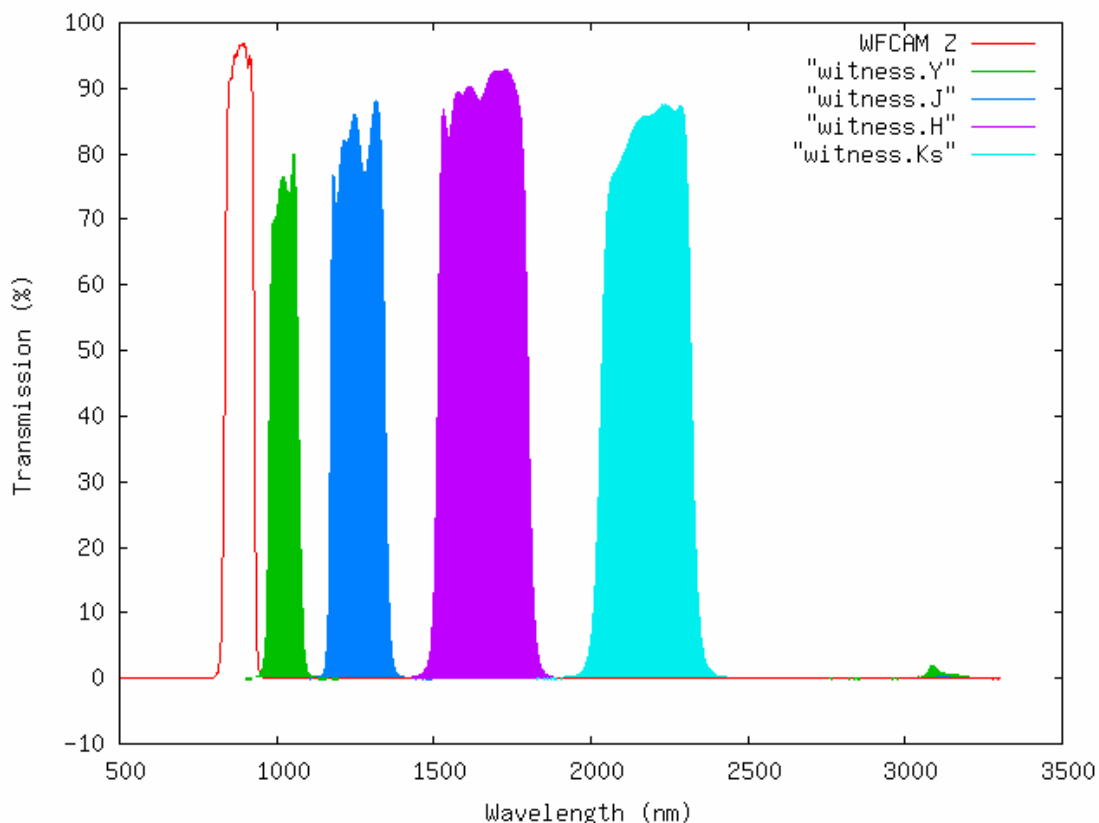

**Figure 2-3 Filter Transmission Curves for Reference Samples of Y, J, H, and K<sub>s</sub> bands.**

One of the filter holders contains a set of 16 cold blanks (metal units which completely block the detectors from incoming sky radiation, and produce negligible thermal emission) which are used for taking dark frames. The instrument will be delivered with 6 filter sets (Z, Y, J, H, K<sub>s</sub> and a narrow-band at 1.185μ - Figure 2-3)

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	14 of 71

and a further set of cold blanks, which can be replaced with other filters in due course. The position angle of the camera axis can be controlled by the instrument rotator. Single integrations are taken by a Reset-Read-Read procedure with the difference of the two Reads being performed within the DAS.

## **2.2 Observing Modes**

IMAGING is the only mode in which science data will be acquired, but the science array is used to acquire data for internal wave-front analysis.

### **2.2.1 Imaging Mode Description**

The sky target position is acquired and tracked and in parallel (for observing efficiency) the required filter set is placed in the beam. The LOWFS provides the necessary updates to the M2 and M1 support units. A set of exposures, each of which may consist of a number of integrations, are taken and are usually jittered by small offsets, to remove bad pixels and determine sky background. The set of exposures produced is combined in the pipeline to create a single pawprint, in which the jitters from all detectors are included.

Six such pawprints, taken at appropriate offsets, can be combined to produce an almost uniformly sampled image of a contiguous region, each bit of sky, except at the edges, having been observed by at least two pixels. The individual exposures making up each pawprint may be made on a jitter or a microstep pattern. Microstep patterns are interleaved rather than combined, so the calibration procedures are unchanged, though the data volume increases.

### **2.2.2 Calibrations**

The calibrations are of four sorts:

- i. those that characterize the properties of the transfer function (image in, electrons out) of the end-to-end system (telescope, camera, IR detector system including associated controllers, etc.) so that instrumental effects can be removed from the data. As VISTA has a wide field of view, particular attention must be paid to variations across the field;
- ii. those that characterize the astrometric distortions of the images;
- iii. those that characterize the photometric zero points and extinction coefficients corresponding to the images;
- iv. those that generate Quality-Control measures.

### **2.2.3 High Order Wave Front Sensor (HOWFS) Mode**

The HOWFS mode is processed in the Instrument Workstation and is logically part of the TCS. However, as it uses the IR detectors, all of whose data are passed to the archive, it is considered as a separate observing mode for VISTA pipeline purposes.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	15 of 71

In HOWFS mode a special beam-splitting filter is used to make a curvature sensor in which two images (above and below focus) of a reference star are formed and used to generate corrections to the forces in the M1 support unit, ensuring the mirror figure is maintained. This mode will typically be used of order twice a night (start and around midnight), or less often if the repeatability of the lookup table is good.

### 2.2.4 Calibrations

The HOWFS uses some of the science mode IR detectors, but has a special beam splitting filter whose unique signature needs to be removed from the HOWFS data before it can be analysed. However, this flat-fielding is carried out within the HOWFS image-analysis software (which is part of the Camera Software) and not by the pipeline, and is noted here for completeness.

## 2.3 Pipeline

The VISTA pipeline will produce photometrically and astrometrically calibrated pawprints, with instrumental artefacts removed. In order to achieve almost uniform coverage of a full contiguous area of sky, a six point offset pattern is used by default. A template that implements this pattern is defined and the pipeline will calibrate the resulting six pawprints individually. The further step of combining these into a contiguous map is left to the science user.

For certain science programs the OS will allow distinct OBs for eventual “PI” processing; the main example of this would be observing offset sky frames to calibrate the sky in extended-object science frames. The QC pipeline is not required to associate such observations, but will perform routine reductions on such data.

Other processes which are not calibration issues, but which may nevertheless relate to achievable data quality, are not discussed here. Such (excluded) processes include:

- *co-addition of individual integrations* of a pawprint into a single exposure within the data-acquisition system;
- *combination of many pawprints* to cover contiguous areas of sky;
- *co-addition of many pawprints* to go deeper.

## 2.4 Operation

This section defines the observing modes, Section 3 contains an error discussion, Section 4 describes the calibration data required for instrumental signature removal, Section 5 describes the calibration data required for photometric calibration. Section 6 describes the calibration data to be derived from science data, including astrometric calibration. Section 7 discusses Quality Control measures based on regularly measured selected sets of calibrations for the purpose of instrument “health checks”. Section 8 describes all templates and Section 9 the Technical Programs. Finally Section 10 details the Format of Data Frames.

The philosophy throughout is that the VISTA pipeline will be triggered by the completion of each template. In the case of a template aborting, the pipeline will process as far as possible with the available data. The content of the FITS headers

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	16 of 71

allow the VISTA pipeline to handle the set of observed files as an ensemble and to choose appropriate processing based on the header information.



<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	17 of 71

## 3 Calibration Accuracy

### 3.1 Overview

The error budgets for the astrometric, photometric and flat-fielding requirements have two generic components, systematic and random, that contribute to the overall errors.

We discuss each in turn and indicate how the requirements will be met by the strategy adopted.

### 3.2 Astrometric Error

The astrometric calibration will be based on the 2MASS PSC. 2MASS astrometry is derived from direct calibration to TYCHO 2 and is in the ICRS system. [Note that this requires RADECYSYS = 'ICRS' in the FITS headers]. It is known to have average systematic errors better than  $\sim 100$ mas and RMS errors better than  $\sim 100$ mas, for all point sources with S:N  $> \sim 10:1$  [AD2]. We will be using 2MASS as the primary astrometry calibrator and in tests on similar mosaic instruments we have shown that our suggested ZPN distortion model, combined with a linear plate solution for each detector, achieves astrometric calibration at the 100mas or better level.

The initial WCS will be based on the known detector characteristics (scale, orientation, focal plane position) and telescope pointing information (tangent point of optical axis on sky). The astrometric refinement algorithm will be based on a standard proven method we have developed for optical mosaic cameras and as such will be capable of automatically converging from starting points as far off as an arcmin. However, after commissioning updates we do not anticipate the initial WCS to be this inaccurate, since this level of accuracy is significantly larger than the combined error budget for the alignment of the various system components [RD4].

Further reduction in the internal astrometric systematics beyond 100mas may be possible by monitoring generic trends in the astrometric solution residuals, but this is out-with the scope of this document.

### 3.3 Photometric Error

The photometric calibration for VISTA will be measured in two ways:

- The initial photometric calibration for all filters will be based on the 2MASS PSC. The 2MASS photometric system is globally consistent to  $\sim 1\%$  (Nikolaev et al. 2000). This approach will enable each detector image to be calibrated directly from the 2MASS stars that fall within the field of view. Experience with WFCAM indicates that this approach will result in a photometric calibration to better than 2% for VIRCAM.
- A network of standard star fields will be observed periodically throughout each night (approximately every 2 hours). These data will enable an independent calibration to be made on a nightly basis. These *touchstone* fields will provide important information on the stability of VIRCAM, and will be used to measure any intra-detector spatial systematics.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	18 of 71

### **3.3.1 RMS**

The error budget for photometry of astronomical sources requires photon noise to be the dominant noise source. For this to be the case, integration times should be chosen such that observations are general sky noise limited, i.e. sky noise should be much greater than RMS readout noise and dark current contributions. Clearly, this places a comparable requirement on the RMS contribution from flat fielding. However, providing the master flats used for this are combined from multiple observations with at least a total of 100,000 detected electrons this is easily achievable. In practice a goal of 0.1% RMS flat field noise due to photon noise contribution is the aim.

### **3.3.2 Additive systematics**

More difficult problems to quantify are the systematics present in the various correction stages due to, for example, changing flat-field characteristics, reset anomalies, unexpected background variation and so on. The additive components of these systematics can be dealt with using a background tracking algorithm which effectively monitors and removes background variations to the level of 0.1% of sky, prior to performing object photometry. This will be part of the catalogue generation software. Subsequent derived object catalogues are therefore relatively insensitive to variations in any additive component provided such variations smoothly change over the image with typical scale length  $\sim 20$  arcsec or greater. Abrupt jumps in background level within a single detector frame usually indicate either a processing problem (e.g. the sector non-linearity correction is incorrect) or a hardware problem.

Experience with other NIR mosaics (e.g. WFCAM) suggest that other additive systematic contributions such as fringing, will probably only occur at a relatively low level ( $\sim 1\%$  of sky) and the current defringing scheme will reduce these to a level ( $\sim 0.1\%$  of sky) where their impact is negligible.

The main unknown here is the stability of the reset anomaly. This will be characterised through laboratory tests during camera assembly and acceptance and further quantified during commissioning.

### **3.3.3 Multiplicative systematics**

External differences between the detectors, the differential detector gains, will be calibrated from master twilight flat fields for each passband. In practice the main limitations here are those due to colour equation differences between the detectors, and to residual errors in the nonlinearity corrections rather than the properties of master flat field frames. Intra-detector systematics are taken care of by conventional flat fielding. However, both types of global multiplicative systematics typically can be controlled at the 1-2% level and can be externally monitored and further corrected by the "illumination" measurement correction stage described next. The final photometry correction stage is to use the illumination correction measurements to reduce the effects of uneven illumination e.g. scattered light in the flat fielding, residual detector differences and so on, to below the 2% level. This is a master calibration processing task that is probably best done as either a post main pipeline processing stage or at the science database extraction point.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	19 of 71

### ***3.3.4 Extinction monitoring***

The 2MASS-based calibration provides an instantaneous measurement of the throughput of the system, incorporating extinction. Even on cloudy nights, when the transmission is variable, this will provide a significantly better calibration than can be achieved with routine observations of standard star fields.

Offline, nightly trend analysis of the extinction derived from 2MASS, combined with regular observations of secondary photometric standard fields, set up in the VISTA instrumental system, will enable an independent calibration of most nights to the level of 1% to 2% global.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	20 of 71

## 4 Calibration Data for Instrumental Signature Removal

### 4.1 Purpose

Section 4 describes what calibration data has to be collected with what frequency to allow one to remove instrumental signatures.

For each piece of calibration data required this section defines:

- **Responsible:** responsibility for obtaining the calibration data
- **Phase:** when the calibration data has to be acquired (day or night time)
- **Frequency:** how often calibration data need to be acquired.
- **Purpose:** reason for needing the calibration data
- **Procedure:** the procedure for acquiring the calibration data
- **Raw Outputs:** the output of the procedure
- **Prepared OBs/Templates:** the pre-prepared observation blocks or templates to acquire the calibration data
- **OT queue:** the corresponding Observing Tool queue for the Observation Blocks.
- **Pipeline Recipe:** The name (if any) of the processing recipe applied by the data flow system pipeline. Recipes may contain algorithms and procedures as subcomponents. Each such recipe corresponds to one listed in [RD1].
- **Pipeline Output:** the Pipeline output products, appended with (QC) for those also used as Quality Control parameters
- **Duration:** an estimate of the required time to execute the calibration procedure including overheads.
- **Prerequisites:** possible dependencies on instrumental or sky conditions or other calibration procedures are given
- **See also:** any further information.

The calibration data is used for instrumental signature removal. The aim is to provide pawprints as though taken with a perfect camera, which produces a photometrically linear, defect-free, evenly-illuminated, though sparsely sampled, reproduction of the sky. This will have no additional systematic, random noise or other artefacts, and will be on an arbitrary photometric and astrometric scale.

Off-sky calibrations and quality control measures will be made routinely, before and after observing, using the in-dome illuminated screen.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	21 of 71

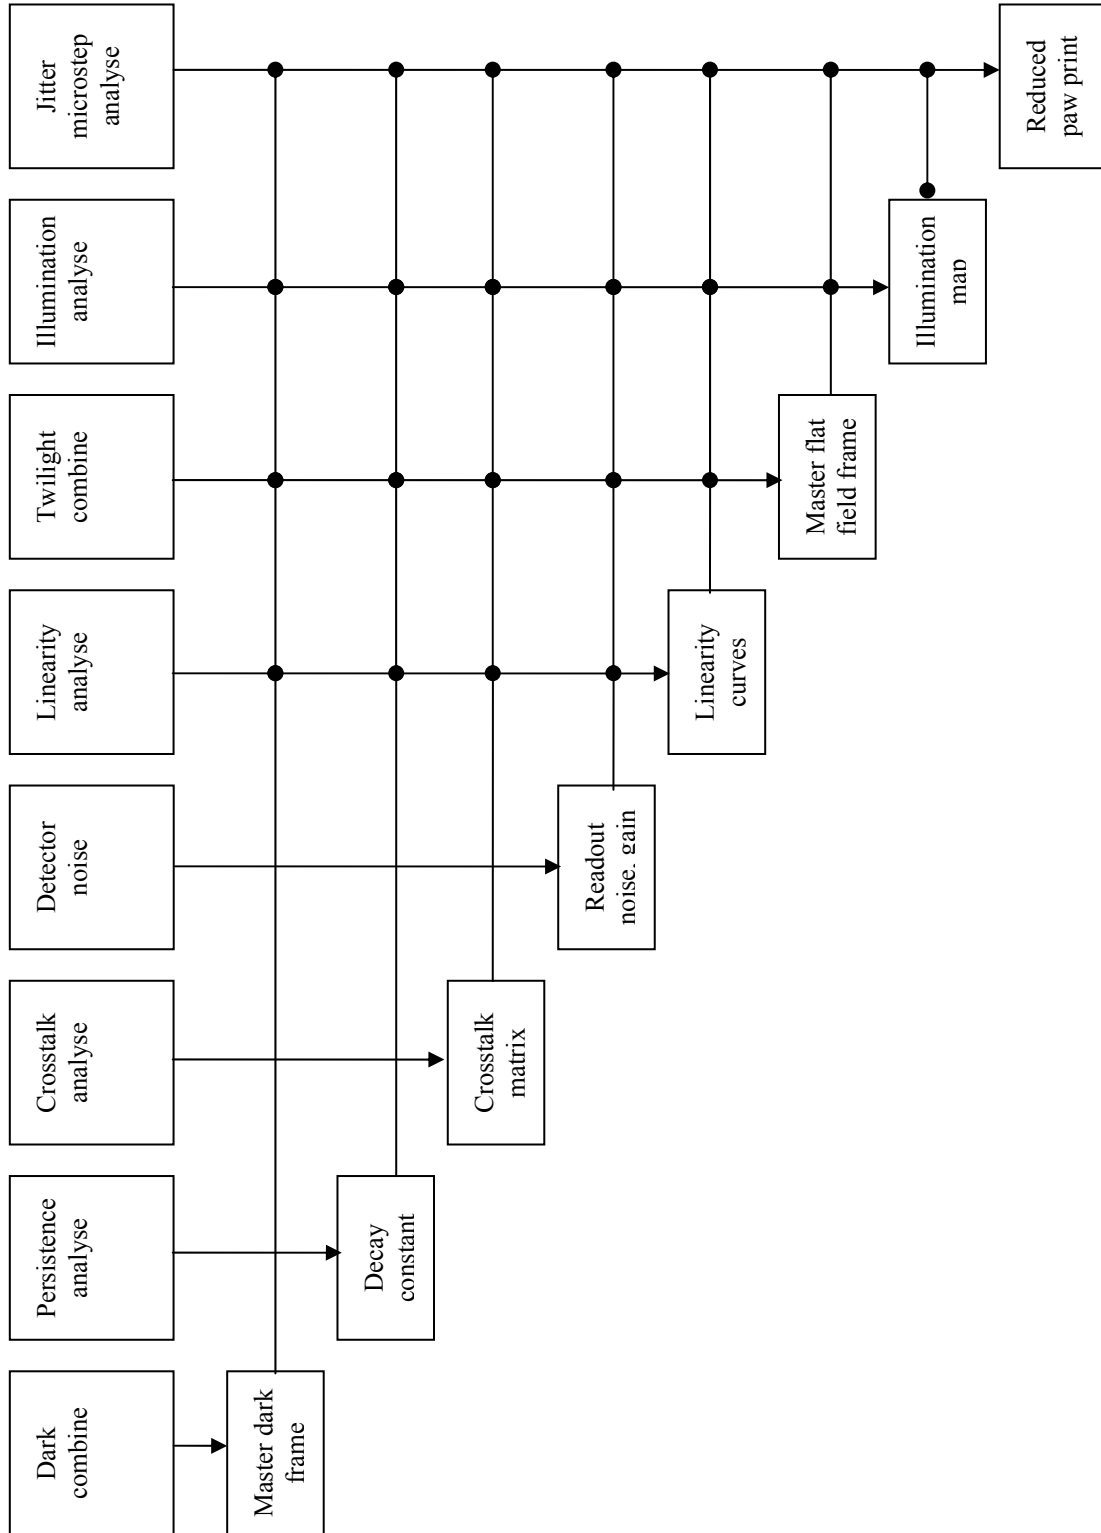


Figure 4-1 Cascade Diagram for producing Calibration Frames

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	22 of 71

## 4.2 Reset Frames

Responsible: Science Operations  
Phase: Daytime  
Frequency: Daily  
Purpose: A Reset frame is a Reset-Read sequence with minimum exposure taken with the cold blank in (1 sec is the minimum VISTA can produce, but 10s would be a more realistic estimate for the duration for a single exposure including overheads as the IRACE system is specified to process an exposure within 5s and to allow the next exposure to start within 10s). It differs from a dark frame, which consists of a Reset-Read-Read sequence where the output is the difference of the two reads. The aim is to map the effect of the reset. Sequences of Reset frames will be taken off-sky and analysed to estimate the stability of the reset pedestal and pixel to pixel variation.

Procedure: Read out frame, compare with library reset frame.  
Raw Outputs: FITS files  
Template: VIRCAM\_img\_cal\_reset.tsf  
OT queue: VIRCAM.Daytime.Calibration  
Pipeline Recipe: vircam\_reset\_combine  
Pipeline Outputs: Variance with respect to standard frame (QC)  
Duration: 10 s  
Prerequisites:  
See Also:

## 4.3 Dark Frames

Responsible: Science Operations  
Phase: Daytime  
Frequency: Daily  
Purpose: Dark Frames are used to calibrate out and measure two separate additive effects.

- the accumulated counts that result from thermal noise (dark current). This is generally a small, but not negligible effect.
- an effect, here called 'reset anomaly', in which a significant residual structure is left in the image after the reset is removed in the DAS, when it does a correlated double sample (CDS, Reset-Read-Read).

Both dark current and reset anomaly are additive and can be removed together, using dark frames (exposures with cold blank filters completely blocking the detectors from incoming radiation) taken with the same integration time as the target observation. In order to minimize contamination from transient events, a dark frame would be a combination of many frames with rejection.

If the spatial structure of the reset anomaly is not stable with time

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	23 of 71

it could leave a challenging background variation over the detector, which may need to be removed with a background filter. This latter scenario is best avoided as real astronomical signal will inevitably be removed.

(In general, for other instruments examined where the reset anomaly structure is repeatable and stable, the integration time seems to determine the spatial structure of the residuals, while the ambient flux seems to determine its intensity.)

Procedure: A series of dark frames will be taken with each integration and exposure time combination used for target observations so that the structure of the reset anomaly can be modelled correctly and the dark correction is consistent. The Dark template, which does not require the telescope, will insert the cold blank and perform a timed exposure. If the requested time is less than the array minimum read-out cycle time of  $\sim 1$ s (e.g. zero) the controller will deliver, and report, the minimum detector integration time of  $\sim 1$ s.

Raw Outputs: FITS Files

Templates: VIRCAM\_img\_cal\_dark.tsf; vircam\_img\_cal\_darkcurrent.tsf

OT queue: VIRCAM.Daytime.Calibration

Pipeline Recipes: vircam\_dark\_combine; vircam\_dark\_current

Duration: One set of observations for each integration and exposure setting for the science observations made on the same night

Pipeline Outputs: Mean Dark

Dark + reset anomaly stability measure (QC)

Detector dark current (QC)

Detector Particle Event rate (QC)

Prerequisites:

See Also:

#### **4.4 Dome flats**

Responsible: Science Operations

Phase: Daytime or non-observing nights.

Frequency: Daily

Purpose: Monitoring instrument performance, image structure, and confidence maps. They will not be used for gain correction (flat-fielding) due to non-uniform illumination over the whole of the focal plane and the different colour of the illumination compared to the night sky. Note that dome flats may have a spectral energy distribution closer to that of some objects of interest and thus be more adequate for gain correction, but for pipeline processing whole fields in a consistent way an average gain/flat-field correction for typical objects is the usual method.

Procedure: The Dome template will acquire the dome screen (constant illumination); a series of timed exposures are made through a given filter.

Raw Outputs: FITS files

Prepared OBS: VIRCAM\_img\_cal\_domeflat.obx

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	24 of 71

OT queue: VIRCAM.Daytime.Calibration  
Pipeline Recipe: vircam\_dome\_flat\_combine  
Pipeline Outputs: Updated Master dome flats  
Updated confidence maps  
Bad pixel statistics (QC)  
Number of saturated pixels  
Lamp efficiency

Duration: 10 min

Prerequisites: The need for constant illumination of the dome screen implies that the dome flats cannot be taken in conditions of variable or excessive ambient light.

See Also: Dome flat observations are also employed in linearization measurements described in 4.6 and in generating bad pixel maps.

#### **4.5 Detector Noise**

Responsible: Science Operations  
Phase: Daytime  
Frequency: Daily  
Purpose: In order to understand the noise properties of the detectors, it is important to measure the readout noise and gain of each chip. This is a vital piece of information, not only as large changes in either property could signal a detector health issue, but also as further down the pipeline the issue of pixel rejection algorithms becomes important (for example, during jittering).

Procedure: Both of these properties can be measured from a pair of dark exposure frames and a pair of dome flat frames. The dark exposures should have matching integration and exposure times to the dome flats, and both dome flat frames should be observed with the same dome illumination. Care should be taken to ensure that the flats are exposed in a region of the response curve where the detectors are reasonably linear.

Raw Outputs: FITS files  
Template: VIRCAM\_img\_cal\_noisegain.tsf  
OT queue: VIRCAM.Daytime.Calibration  
Pipeline Recipe: vircam\_detector\_noise  
Pipeline Outputs: Readout noise and gain estimate for each read-out channel of each detector (QC)

Duration: 1 minute  
Prerequisites:  
See Also:

#### **4.6 Linearization Measurements**

Responsible: Science Operations  
Phase: Daytime or cloudy nights (better)  
Frequency: Monthly



<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	25 of 71

**Purpose:** Infrared detectors can be strongly non-linear. The linearity curve of each detector can be determined through a series of differently timed dome screen observations under constant illumination. These curves are used in conjunction with the pixel timing information to obtain a true linear value for each pixel and to generate high-accuracy bad-pixel maps (linearization in the DAS would be an alternative but is not included in the Technical Specification).

**Procedure:** On a series of specified dates (monthly) take series of dome flats under constant illumination at varying exposures up to full counts.

**Raw Outputs:** FITS files

**Prepared OBS:** VIRCAM\_img\_cal\_linearity.obx

**OT queue:** VIRCAM.Daytime.Calibration

**Pipeline Recipe:** vircam\_linearity\_analyse

**Pipeline Output:** Linearization curve and lookup tables  
updated bad-pixel maps  
Measure of non-linearity function (QC)  
Bad pixel statistics (QC)

**Duration:** [30] min

**Prerequisites:** The need for constant illumination of the dome screen implies that the dome flats cannot be taken in conditions of variable or excessive ambient light.

**See Also:** Dome flat measures in 4.4

## **4.7 Twilight Flats**

**Responsible:** Science Operations

**Phase:** Twilight

**Frequency:** Evening/Morning

**Purpose:** Flat-fielding removes multiplicative instrumental signatures from the data. This includes pixel-to-pixel gain variations and the instrumental vignetting profile. It also provides a global gain correction between detectors and individual read out channels within each detector. (Each of the 16 detectors has 16 read out channels, giving a total of 256.)

Mean flat-fields also are the data source for the science-level confidence map for each detector and filter combination. This is similar to a weight/bad-pixel map where the mean level is normalized to a value of 100% and bad pixels are flagged with a value of zero. It is used in conjunction with an estimate of the sky background variance in each frame to propagate the weight of each individual pixel. Although this is especially important for later manipulation of the pawprints outside the VISTA pipeline for doing deep stacking and tiling, it is also vital for the object detection part of the pipeline which is used, *inter alia*, in astrometric and photometric corrections.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	26 of 71

Mean flat-fields can be derived from a variety of sources (each with their own advantages and disadvantages). Sky flats taken at twilight have a good (but not perfect) colour match to the night sky observations we wish to correct, and can be taken under conditions where the contribution from night sky fringing, emission from dust (on the optical surfaces) and other spatial effects are most negligible. The slightly imperfect colour match between the twilight and night sky will cause a very small residual error in the gain correction. Dusk and dawn twilight flats can be combined (outside of the pipeline), to update the master flats, and thereby moderate effects caused by the significant variation in the illumination caused by the reset and read times.

Procedure: The sky level must be such that any emission from fringing or dust on the optical surface will be negligible in comparison, and this means that there is only a short time in which to acquire the twilight flats. It will not always be possible to get a complete set of twilight flats every night for schedules involving many filters or on nights with changeable weather. If, however, the detector flat-fields are sufficiently stable, then it is possible to use master flats taken over several nights, which is the method of choice.

Raw Outputs: FITS Files  
 Prepared OBs: VIRCAM\_img\_cal\_twiflat.obx  
 OT queue: VIRCAM.Daytime.Calibration  
 Pipeline Recipe: vircam\_twilight\_combine  
 Pipeline Output: Mean twilight flats  
 Confidence maps  
 Change (vs calibDb) in mean gain correction coefficients between detectors and channels (QC)  
 Duration: 10 min evening twilight, 10 min morning twilight.  
 Prerequisites:  
 See Also:

#### **4.8 Illumination Correction Measurement**

Responsible: Science Operations  
 Phase: Night  
 Frequency: Monthly  
 Purpose: The gain correction as modelled by the flat-field should remove all pixel-to-pixel gain differences as well as any large-scale variations due (generally) to vignetting within the focal plane. However, scattered light within the camera may lead to large-scale background variations which cannot be modelled and removed, as its level depends critically on the ambient flux. Dividing a target frame by a flat-field frame that is affected by this will cause systematic errors in the photometry across the detector. It is necessary to map out the spatial systematic effects across each detector so that a correction map can be factored into

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	27 of 71

the final photometry measured from each detector.

Procedure: The illumination correction can be measured in two ways. In the event that observations of a secondary photometric standard field with a density of 100-200 objects per detector are available, then the illumination correction can be measured by looking at the spatial variation of the photometric zero-point across each detector. If such a field is not available, then a mesostep sequence is taken consisting of a series of exposures of a sparse field of relatively bright stars on a regular grid of offsets that cover one detector. Measuring a flux on each exposure allows the definition of a position-dependent scale factor (this must be done for each filter and each detector).

Raw Outputs: FITS files  
 Prepared OBs: VIRCAM\_img\_cal\_illumination.obx  
 OT queue: VIRCAM.Nighttime.Calibration  
 Pipeline Recipe: vircam\_mesostep\_analyse  
 Pipeline Output: Correction map  
 Duration: 30 min  
 Prerequisites: Photometric conditions  
 See Also:

#### **4.9 Image Persistence Measurements**

Responsible: Science operations  
 Phase: Night  
 Frequency: Monthly and on detector/controller change  
 Purpose: Image persistence (sometimes also called 'remanence') is the effect where residual impressions of images from a preceding exposure are visible on the current image.

Procedure: On a sequence of (monthly) dates choose a fairly empty field with a nearly saturated star. Take an exposure and then a sequence of dark frames to measure the characteristic decay time. This must be done for each detector.

Raw Outputs: FITS files  
 Prepared OBs: VIRCAM\_img\_cal\_persistence.obx  
 OT queue: VIRCAM.Nighttime.Calibration  
 Pipeline Recipe: vircam\_persistence\_analyse  
 Pipeline Output: Persistence constants  
 Duration: 10 min (although if the decay time constant turns out to be significantly more than about half a minute, then this may be something of an underestimate).  
 Prerequisites:  
 See Also:

#### **4.10 Electrical Cross-Talk Measurements**

Responsible: Science operations

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	28 of 71

Phase: Night

Frequency: Monthly

Purpose: Electrical cross-talk will be measured in the laboratory and during commissioning, and is expected to be negligible. As cross-talk might change with any alterations to the electrical environment, a routine procedure to check it is planned.

Procedure: The 16 detectors are read out in 16 channels, making a total of 256 channels in the camera. Cross-talk calibration consists of placing a saturated star on a channel and measuring any effect on the other 255 channels. This results in a 256x256 matrix, the majority of whose elements will hopefully be zero. Any electrical cross talk between different detectors is anticipated to be smaller than between channels within a detector.

Raw Outputs: FITS Files

Templates: VIRCAM\_img\_acq\_crosstalk, VIRCAM\_img\_cal\_crosstalk

OT queue: VIRCAM.Nighttime.Calibration

Pipeline Recipe: vircam\_crosstalk\_analyse

Pipeline Output: Cross-talk matrix.  
Average measure of off-diagonal components (QC)

Duration: 10 min for all detectors, assuming a decay time-constant < 30s

Prerequisites:

See Also:

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	29 of 71

## 5 Data for Photometric Calibration

### 5.1 Introduction

The camera will be on the telescope semi-permanently, in a survey mode, providing a stable configuration which enables a long-term approach to photometric calibration to be taken. The strategy is to define routine calibration procedures, so that the accuracy, and hence the scientific value, of the archive, will be maximized. Magnitudes will be calibrated on the Vega scale.

As briefly mentioned in Section 3.3, VIRCAM observations will enable two independent calibrations:

1. from the 2MASS all-sky point source catalogue and
2. from routine observations of standard star fields

We discuss the details of the two methods below

### 5.2 Calibration from 2MASS

The photometric zeropoint is derived for each image from measurements of  $\square$  stars in the 2MASS point source catalogue (PSC) by solving

$$ZP_{VIRCAM} + m_{inst} - m_{2MASS} = CT(J - H)_{2MASS} + const$$

for all stars in common with VIRCAM (above a threshold signal-to-noise in the PSC and unsaturated in CIRCAM), where:

- $ZP_{VIRCAM}$  is the zeropoint for the filter and detector
- $m_{inst}$  is the VIRCAM instrumental magnitude for the filter (=  $-2.5\log(\text{counts/sec})$ )
- $m_{2MASS}$  is the 2MASS PSC magnitude
- $CT$  is the colour term and is derived from a large number of observations
- $(J - H)_{2MASS}$  is the 2MASS PSC colour of the star
- $const$  is an offset which may be required in some passbands to ensure the magnitude is on the Vega system.

Subsequent inter-detector comparisons will enable residual errors in the gain correction to be detected and calibrated. Offline analysis would provide a measure of the median zeropoint for the night, and an associated error (and scatter), indicative of photometric quality of the night.

### 5.3 Calibration from Standard Star Fields

At any time ( $t$ ) on any night ( $n$ ) for any star ( $i$ ) in any filter waveband ( $b$ ),

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	30 of 71

$$m^{cal}_{ib} = m^{inst}_{ibm} + ZP_{bm} - \kappa_{bm}(X - 1) \quad \text{Equation 1}$$

where  $ZP$  is the Zero Point (i.e. the magnitude at airmass unity which gives 1 count/second at the detector),  $m^{cal}$  is the calibrated instrumental magnitude,  $m^{inst}$  is the measured instrumental magnitude ( $-2.5 \times \log_{10}[\text{counts/sec}]$ ),  $\kappa$  is the extinction coefficient and  $X$  is the airmass of the observation. This assumes that the second-order extinction term and colour-dependency of  $\kappa$  are both negligible.

Typically, the Zero Point of the instrument + telescope system should be stable throughout the night. Long-term decreases in the sensitivity of the instrument, and hence a decreasing  $ZP$ , could be caused by for example the accumulation of dust on the primary mirror.

On photometric nights the extinction coefficient  $\kappa$  should be constant in each filter. The extinction  $\kappa$  will be monitored through each night assuming a fixed zero point and making measurements over a range of airmass. Although 2MASS found their extinction coefficients to vary seasonally any effect should be much less for VISTA since it has narrower filter profiles especially at J, and is at a much drier site.

A network of Secondary Standard photometric fields will be set up so that routine photometric standard observations can be made with the telescope in focus *every two hours*. The standard fields are selected to be 2MASS touchstone fields and or UKIRT faint standard fields, and many will have been observed and calibrated in advance by WFCAM. The secondary fields meet the following criteria:

- Extend over the area of the IR camera pawprint
- Span 24 hours in RA, with a target spacing of 2 hours.
- Enable observations over a range of airmass. Some must be chosen to pass close to the zenith of VISTA (for airmass unity). Some fields will be available to the North and South of the zenith to optimize telescope azimuth slewing. The remainder will be near-equatorial.
- Have a density of sources sufficient to characterize the systematic position-dependent photometric effects in VISTA, but not be too crowded. The target is of order 100 stars per detector with magnitudes no fainter than J=18, K<sub>s</sub>=16 to avoid prohibitively long exposures.
- They should encompass as broad a spread as possible in colour in order to derive colour terms robustly and facilitate transformations from and to other filter systems and e.g. the AB magnitude system. i.e.

$$M^{std} = m_b^{cal} + C(M_x^{std} - M_y^{std}) \quad \text{Equation 2}$$

where  $M^{std}$  is the magnitude in a defined standard system,  $m_b^{cal}$  is the calibrated magnitude in the instrumental system, and  $C$  is the colour term for the appropriate standard colour index ( $M_x^{std} - M_y^{std}$ ).

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	31 of 71

- Technical Program TP-VIS1 describes the observations needed to set up the secondary standard fields.

#### **5.4 Observe Standard Fields**

Responsible: Science Operations

Phase: Night

Frequency: 2-Hourly

Purpose: Determine  $ZP$  and  $\kappa$  to allow application of

$$m^{cal}_{ib} = m^{inst}_{ibtn} + ZP_{btm} - \kappa_{btm}(X - 1)$$

to photometrically calibrate all objects seen.

In the event that observations of a secondary photometric standard field with a density of 100-200 objects per detector are available, then the illumination correction can be measured by looking at the spatial variation of the photometric zero-point across each detector.

Procedure: Suitable fields from this network will be observed over a range of airmass each night to determine the Zero Points ( $ZP$ ) to monitor the extinction coefficients ( $\kappa$ ) for all broad-band filters, and if sufficiently high density of standards, to measure the illumination correction.

Outputs: FITS files

Template: VIRCAM\_img\_cal\_std.tsf

OT queue: Science

Pipeline Recipe: vircam\_standard\_process

Pipeline Output: Zero Point ( $ZP$ )  
Extinction coefficient ( $\kappa$ )  
Illumination correction map  
Colour terms ( $C$ )  
Illumination correction  
Global gain correction (check)

Duration: 5 min 10 times per night

Prerequisites:

See Also:

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	32 of 71

## 6 Calibration Data Derived from Science Data

### 6.1 For Instrument Signature Removal

#### 6.1.1 Night-Sky Maps

Responsible: Science Operations

Phase: Night

Frequency: Throughout night

Purpose: If experience shows that the detector flats are not reliably stable over the timescale of a night, then night-sky flats will have to be used instead. These are formed either from the target frames or from any special offset sky frames that might have been taken (for example where there is a large extended object in the field). All such frames over an appropriate time range are combined with rejection to form a normalized night sky flat-field. The advantage of dark flats over twilight flats is the better colour match to the average astronomical object. This minimises the sensitivity of the gain and flat-field correction to differential colour terms with respect to astronomical objects. However, fringing and thermal emission from dust particles on the optical surfaces can be high enough to affect the background significantly in some passbands. Dividing the target frames by a sky flat without correcting for these two additive effects could lead to significant systematic errors in photometry. In the Garching pipeline, master flats will be determined from as many observations as possible, but if it is determined that the flats vary rapidly, then only flats taken close in time may be useable.

Procedure: Use normal science exposures.

Raw Outputs: FITS Files

Prepared OBs: None

OT queue: science

Pipeline Recipe: `vircam_jitter_microstep_process`

Pipeline Output: Night sky maps

Duration: Occurs in parallel with all night observing

Prerequisites: Determine the characteristics of fringing and thermal emission from dust on the optical surfaces during commissioning.

See Also: 6.1.2

#### 6.1.2 Sky Subtraction and Fringe Removal

Responsible: Science operations

Phase: Night

Frequency: Throughout night

Purpose: The sky background varies over large scales in the infrared. In some wavebands, fringing and thermal emission from any local dust (on optical surfaces) will also be present. All of these



<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	33 of 71

effects can be removed using the sky-subtraction algorithm. The source of the sky background estimate is usually the science data frames themselves. In cases where large extended or very bright objects might be present, it may be necessary to use ‘offset sky’ exposures in the observation template.

Procedure: Preset or offset to, uncrowded, regions taken near or adjacent to the region of interest. Observe in the same way as the corresponding science field.

Raw Outputs: FITS Files

Prepared OBs: None

OT queue: science

Pipeline Recipe: `vircam_jitter_microstep_process`

Pipeline Output: Local sky estimate  
Fringe and dust maps

Duration: Same as science field.

Prerequisites:

See Also:

### 6.1.3 Jittering

Responsible: Science Operations

Phase: Night

Frequency: Nearly all the time

Purpose: Removal of bad pixels and other cosmetic effects, as well as cosmic rays, and determining the sky background. Typically a long exposure is split into several shorter exposures, which, rather than being repeated with each pixel looking at exactly the same sky position, are carried out at a series of different (jittered) positions. This is similar to microstepping (same template), but with less fine sampling, and the pipeline combines the jittered exposures using a rejection algorithm.

Procedure: Perform a specified pattern of exposures at each position of a jitter pattern. Predefined patterns and movement size in pixels may be selected. Microsteps can be nested within each jitter position by setting the number of microsteps appropriately in the template.

Raw Outputs: FITS Files

Template: `VIRCAM_img_obs_paw.tsf`, `VIRCAM_img_obs_tile.tsf`,  
`VIRCAM_img_obs_offsets.tsf`

OT queue: Science

Pipeline Recipe: `vircam_jitter_microstep_process`

Pipeline Output: Combined frames of pawprint  
Confidence map for pawprint

Duration: Variable

Prerequisites:

See Also: 6.1.4

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	34 of 71

### 6.1.4 Microstepping

Responsible: Science operations

Phase: Night

Frequency: As required

Purpose: Improved sampling. This is most likely to be employed in times of excellent seeing, when the point-spread function is under-sampled. It can also be used if there are strong intra-pixel sensitivity (QE) variations. It may not be commonly used. It is similar to jittering (same template) but with improved sampling through finer pattern spacing, and the pipeline interleaves the exposures without further rejection.

Procedure: Perform a specified pattern of exposures at each position of a microstep pattern. Predefined patterns and movement size in pixels may be selected, and there is a default pattern/size [2×2 pattern, modulo a 0.5 pixel shift]. By setting the number of microsteps appropriately in the template, microsteps can be nested within each jitter position.

Raw Outputs: FITS Files

Template: VIRCAM\_img\_obs\_paw.tsf

OT queue: Science

Pipeline Recipe: vircam\_jitter\_microstep\_process

Pipeline Output: Interleaved science frames with corresponding confidence maps

Duration: Variable

Prerequisites:

See Also: 6.1.3

## 6.2 For Astrometric Calibration

Astrometric calibration will take the instrument signature free pawprints and provide the transformation between pixel coordinates and celestial coordinates for each of the 16 constituent images, though still leaving the pawprints on an arbitrary photometric scale. The transformations are manifested in a Flexible-Image Transport System (FITS) [RD12] World-Coordinate System (WCS) [RD14]. The projection used will be Zenithal Polynomial (ZPN), based on the predicted properties from the optical design.

Quantifying the distortion terms used in the WCS will be done from on-sky observations. An initial astrometric distortion is available from the optical design, and an updated early empirical value will be derived from commissioning data. Following that, an increasingly accurate value will be derived from the astrometry of all target frames.

### 6.2.1 Optical Distortion Effects

Responsible: Science Operations

Phase: Night

Frequency: All science frames

Purpose: The strongest term in the optical-distortion model is the cubic radial term, but this and all distortions will be slightly colour (i.e. filter) dependent and must be determined on sky. The expected

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	35 of 71

power of the distortion means that no practically useful jitter is possible without non-linear resampling. The radial scale distortion also has an impact on photometric measurements, inducing an error up to 3.5% in the corners of the field, compared to the centre, if uncorrected. It is thus crucial to determine it accurately.

Procedure: Astrometric stars in the science fields are used to map the distortion, an increasingly accurate description of which builds up from the astrometry of all target frames.

Raw Outputs: FITS files

Prepared OBs: None

OT queue: Science

Pipeline Recipe: This is not part of the pipeline.

Pipeline Output: Refined optical distortion model

Duration: No overhead

Prerequisites: Initial value from optical design, an early empirical value from commissioning data,

See Also:

### 6.2.2 Final WCS Fit

Responsible: DFS calibration pipeline

Phase: Night

Frequency: All imaging frames on sky

Purpose: The camera software writes an initial WCS based on the given position of the guide star into the FITS headers of each data frame. The accuracy will be better than 2", dependent on the guide star accuracy, and the determined geometry of the camera. This provides a close starting point for orientation of the data frames and location of astrometric stars for a full WCS solution that will provide refined scientific quality astrometry. After instrumental-signature removal astrometric stars are centroided in the data frames to typically 0.1 pixels accuracy. An astrometric solution is carried out using reference catalogues based on the International Coordinate Reference Frame (ICRF) [e.g. 2MASS catalogue]. Accuracy is dependent on the reference catalogue accuracy, but the final uncertainty estimate comes from the RMS of the fit and the known systematics of the reference catalogue.

Procedure: None

Raw Outputs: None

Prepared OBs: None

OT queue: -

Pipeline Recipe: `vircam_jitter_microstep_process`

Pipeline Output: Refined WCS FITS header for all frames

Pointing accuracy (QC) [Calculated from equatorial coordinates computed at particular location using the fitted WCS and the initial WCS that was written to the raw header]

Duration: Zero overhead

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	36 of 71

Prerequisites: Commissioning to determine initial WCS  
See Also:

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	37 of 71

## 7 Quality Control

### 7.1 *Further Quality Control Data Derived from Science Frames*

#### 7.1.1 Object Extraction

Responsible: Science Operations

Phase: Night

Frequency: Nearly all the time

Purpose: Object extraction is vital for various steps in the pipeline, including astrometric and photometric calibration, where the position and/or photometric measures of real objects are required. It is also needed in order to assess the quality of the data in terms of the observing conditions and the depth of exposure.

Procedure: Extract objects from each frame using the object extraction algorithm. Classify objects as stellar, non-stellar and noise using the classification scheme. Use the stellar objects to work out the average properties of the images on the frame.

Raw Outputs: FITS Files

Template: -

OT queue: Science

Pipeline Recipe: `vircam_jitter_microstep_process`

Pipeline Output: Mean sky background (QC)

Mean sky noise (QC)

Number of noise objects (QC)

Mean seeing (QC)

Mean stellar ellipticity (QC)

Duration: Variable

Prerequisites:

See Also:

### 7.2 *On line quality control (QC-0)*

QC-0 is generic for all VLT-compliant instruments and is provided by the Data-Flow Operations group. All image-mode data produced by the instrument is fed into the pipeline to produce QC-1 parameters.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	38 of 71

### 7.3 Quality Control Parameters

Quality-control parameters are generated during pipeline processing. These may be used at a later time for trend analysis.

Parameter	Description
QC.DARKCURRENT average dark current on frame [adu/sec].	measured using the median of the pixel values, can later be compared similar darks for trends
QC.DARKRMS RMS noise of combined dark frame [adu].	RMS is defined here as the Gaussian equivalent MAD ie. $1.48 \times \text{median-of-absolute-deviation from median}$ The RMS can later be compared with library values for darks of the same integration and exposure times.
QC.RESETDIFF_RMS RMS new-library reset frame	measure the RMS of the difference of a new mean reset frame and a library reset frame.
QC.DARKDIFF_RMS RMS new-library dark frame	measure the RMS of the difference of a new mean dark frame and a library dark frame.
QC.PARTICLE_RATE cosmic ray/spurion rate [count/sec/detector].	average no. of pixels rejected during combination of dark frames, used to give an estimate of the rate of cosmic ray hits for each detector. This can later be compared with previous estimates and monitored.
QC.RESETRMS RMS noise in combined reset frame.	variation is defined here as the Gaussian equivalent MAD ie. $1.48 \times \text{median-of-absolute-deviation from unity after normalising by median level}$ ie. measuring the RMS reset level variation. The RMS can later be compared with library values for troubleshooting problems.
QC.READNOISE readnoise [electron].	measured from the noise properties of the difference in two consecutive dark frames, using a MAD estimator as above for robustness against spurions. The noise properties of each detector should remain stable so long as the electronics/micro-code have not been modified.
QC.FLATVAR RMS variation of flatfield pixel sensitivity per detector [percentage].	RMS is defined here as the Gaussian equivalent MAD ie. $1.48 \times \text{median-of-absolute-deviation from unity after normalising by median level}$ ie. measuring the RMS sensitivity variation. The RMS can later be compared with library values for troubleshooting problems.
QC.GAIN gain [e/ADU].	determined from pairs of darks and flatfields of the same exposure/integration time and illumination by comparing the measured noise properties with the expected photon noise contribution. The gain of each detector should remain stable so long as the

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	39 of 71

	electronics/micro-code have not been modified.
QC.BAD_PIXEL_STAT fraction of bad pixels per detector [scalar].	determined from the statistics of the pixel distribution from the ratio of two flatfield sequences of significantly different average count levels. The fraction of bad pixels per detector (either hot or cold) should not change significantly with time.
QC.GAIN_CORRECTION ratio of detector median flatfield counts to global median [scalar].	the ratio of median counts in a mean flat exposure for a given detector relative to the ensemble defines the internal gain correction for the detector These internal relative detector gain corrections should be stable with time.
QC.LINEARITY the percentage average non-linearity [percentage].	derived from measured non-linearity curves for each detector interpolated to 20k counts (ADUs) level. Although all infrared systems are non-linear to some degree, the shape and scale of the linearity curve for each detector should remain constant. A single measure at 20k counts can be used to monitor this although the full linearity curves will need to be examined quarterly [TBC] to look for more subtle changes.
QC.LINFITQUAL the RMS fractional error in linearity fit [scalar]	Derived by applying the linearity coefficients to the image data that were used to measure them. This is the RMS of the residuals of the linearised data normalised by the expected linear value
QC.SATURATION saturation level of bright stars [ADU].	determined from maximum peak flux of detected stars from exposures in a standard bright star field. The saturation level*gain is a check on the full-well characteristics of each detector.
QC.PERSIST_DECAY mean exponential time decay constant [s].	the decay rate of the persistence of bright images on subsequent exposures will be modelled using an exponential decay function with time constant tau. Requires an exposure on a bright star field followed a series of darks.
QC.PERSIST_ZERO fractional persistence at zero time (extrapolated) [scalar].	determined from the persistence decay behaviour from exponential model fitting. Requires an exposure on a bright star field followed a series of darks (as above)
QC.CROSS_TALK average values for cross-talk component matrix [scalar].	determined from presence of +ve or -ve ghost images on other channels/detectors using exposures in bright star fields. Potentially a fully populated 256x256 matrix but likely to be sparsely populated with a small number of non-zero values of band-diagonal form. This QC summary parameter is the average value of the modulus of the off-diagonal terms. Values for the cross-talk matrix should be very stable with time, hardware modifications notwithstanding.
QC.WCS_DCRVAL1 actual WCS zero point X -	measure of difference between dead-reckoning pointing and true position of the detector on sky.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	40 of 71

raw header value [deg].	Derived from current polynomial distortion model and 6-constant detector model offset.
QC.WCS_DCRVAL2 actual WCS zero point Y - raw header value [deg].	measure of difference between dead-reckoning pointing and true position of the detector on sky. Derived from current polynomial distortion model and 6-constant detector model offset.
QC.WCS_DTHETA actual WCS rotation PA - raw PA header value [deg].	measure of difference between dead-reckoning PA and true position angle of the detector. Derived from current polynomial distortion model and 6-constant detector model effective rotation term.
QC.WCS_SCALE measured WCS plate scale per detector [deg/pixel].	measure of the average on-sky pixel scale of detector after correcting using current polynomial distortion model
QC.WCS_SHEAR power of cross-terms in WCS solution [deg].	measure of WCS shear after normalising by plate scale and rotation, expressed as an equivalent distortion angle. Gives a simple measure of distortion problems in WCS solution.
QC.WCS_RMS robust RMS of WCS solution for each detector [arcsec].	robust average of residuals from WCS solution for each detector. Measure of integrity of WCS solution.
QC.MEAN_SKY mean sky level [ADU].	computed using a clipped median for each detector Sky levels (perhaps not at Ks) should vary smoothly over the night. Strange changes in values may indicate a hardware fault.
QC.SKY_NOISE RMS sky noise [ADU].	computed using a MAD estimator with respect to median sky after removing large scale gradients. The sky noise should be a combination of readout-noise, photon-noise and detector quirks. Monitoring the ratio of expected noise to measured provides a system diagnostic at the detector level.
QC.SKY_RESET_ANOMALY systematic variation in sky across detector [ADU].	robust average variation in background level for each detector, computed by measuring the large scale variation from a filtered 64x64 pixel background grid, where each background pixel is a clipped median estimate of the local sky level. Effectively generates an 32x32 sky level map and computes the MAD [TBC] of these values with respect to the global detector median. Monitoring the non-flatness of this gives a measure of reset-anomaly problems.
QC.NOISE_OBJ number of classified noise objects per frame [number].	measured using an object cataloguer combined with a morphological classifier. The number of objects classified as noise from frame-to-frame should be reasonably constant; excessive numbers indicate a problem.
QC.IMAGE_SIZE mean stellar image FWHM [arcsec].	measured from the average FWHM of stellar-classified images of suitable signal:to:noise. The seeing will obviously vary over the night with time, wavelength



<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	41 of 71

	(filter) and as $\text{airmass}^{0.6}$ . This variation should be predictable given local site seeing measures. A comparison with the expected value can be used as an indication of poor guiding, poor focus or instrument malfunction.
QC.APERTURE_CORR 2 arcsec [mag] diam aperture flux correction.	the aperture flux correction for stellar images due to flux falling outside the aperture. Determined using a curve-of-growth of a series of fixed-size apertures. Alternative simple measure of image profile properties, particularly the presence of extended PSF wings, as such monitors optical properties of system; also required for limiting magnitude computations.
QC.ELLIPTICITY mean stellar ellipticity [scalar].	the detected image intensity-weighted second moments will be used to compute the average ellipticity of suitable signal:to:noise stellar images. Shot-noise causes even perfectly circular stellar images to have non-zero ellipticity but more significant values are indicative of one of: optical, tracking and autoguiding, or detector hardware problems.
QC.ZPT_2MASS 1st-pass photometric zeropoint [mag].	the magnitude of a star that gives 1 detected ADU/s (or e-/s) for each detector, derived using 2MASS comparison stars for every science observation. This is a first pass zero-point to monitor gross changes in throughput. Extinction will vary over a night, but detector to detector variations are an indication of a fault.
QC.ZPT_STDS photometric zeropoint [mag].	the magnitude of a star that gives 1 detected ADU/s (or e-/s) for each detector, derived from observations of VISTA standard star fields. Combined with the trend in long-term system zero-point properties, the ensemble "average" zero-point directly monitors extinction variations (faults/mods in the system notwithstanding) The photometric zeropoints will undoubtedly vary (slowly) over time as a result of the cleaning of optical surfaces etc.
QC.LIMITING_MAG limiting mag ie. depth of exposure [mag].	estimate of 5-sigma limiting mag for stellar-like objects for each science observation, derived from QCs ZPT_2MASS, SKY_NOISE, APERTURE_CORR. Can later be compared with a target value to see if main survey requirements (ie. usually depth) are met.
QC.FRINGE_RATIO [scalar] Ratio of sky noise before to after fringe fit	A robust estimate of the background noise is done before the first fringe fitting pass. Once the last fringe fit is done a final background noise estimate is done. This parameter is the ratio of the value before fringe fitting to the final value after defringing.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	42 of 71

## 8 Templates

The hierarchy of the templates defined for VIRCAM are shown in Figure 8-1 below. There are a series of templates for each of the operating modes described in section 3. Note: the template definitions are refined from those presented in early drafts of this document to reflect enhancements in the final design of the camera observation software [RD6].

- Acquisition templates (*shown in blue italic*), which define the operating mode and telescope target parameters. Each Observation Block begins with an acquisition template defining the primary target to which that Observation Block refers. Acquisition templates do not generate exposures.
- Calibration templates (*shown in red*), which obtain exposures necessary for calibrating observations in a particular instrument mode. A calibration template can result in one or more exposures being made.
- Observation templates (*shown in black*), which obtain the exposures necessary to make science observations. An observation template can result in one or more exposures being made.

### HOWFS mode

- *VIRCAM\_howfs\_acq*
- *VIRCAM\_howfs\_acq\_domescreen*
- *VIRCAM\_howfs\_cal\_reset*
- *VIRCAM\_howfs\_cal\_dark*
- *VIRCAM\_howfs\_cal\_domeflat*
- VIRCAM\_howfs\_obs\_exp
- VIRCAM\_howfs\_obs\_wfront

### IMAGING mode

- *VIRCAM\_img\_acq*
- *VIRCAM\_img\_acq\_twilight*
- *VIRCAM\_img\_acq\_domescreen*
- *VIRCAM\_img\_cal\_reset*
- *VIRCAM\_img\_cal\_dark*
  - *VIRCAM\_img\_cal\_darkcurrent*
- *VIRCAM\_img\_cal\_domeflat*
  - *VIRCAM\_img\_cal\_linearity*
  - *VIRCAM\_img\_cal\_noisegain*
- *VIRCAM\_img\_cal\_twiflat*
- *VIRCAM\_img\_cal\_persistence*
- VIRCAM\_img\_obs\_paw
  - *VIRCAM\_img\_cal\_std*
  - VIRCAM\_img\_obs\_exp
  - VIRCAM\_img\_obs\_tile
    - *VIRCAM\_img\_cal\_crosstalk*
  - VIRCAM\_img\_obs\_offsets
    - *VIRCAM\_img\_cal\_illumination*

Figure 8-1 Hierarchy of VISTA IR Camera Templates

The relationship between the templates, the data they produce and the pipeline recipes which will be used is displayed in Table 8-1.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	43 of 71

DATA FILE	VIRCAM_TEMPLATE	DRP CATG	DRP TYPE	DPR TECH	RECIPE	HEADER INPUTS	CALIB DB	PRODUCTS
HOWFS reset frame	howfs_cal_reset	TECHNICAL	BIAS	IMAGE	HOWFS data is processed on the instrument workstation			
HOWFS Dark Frame	howfs_cal_dark	TECHNICAL	DARK	IMAGE				
HOWFS dome flat	howfs_cal_domeflat	TECHNICAL	FLAT,LAMP	IMAGE				
HOWFS wavefront	howfs_obs_exp	ACQUISITION	OBJECT, PSF-CALIBRATOR	IMAGE				
HOWFS wavefont	howfs_obs_wfront	ACQUISITION	OBJECT, PSF-CALIBRATOR	IMAGE				
Test observation	img_obs_exp	TEST	OBJECT	IMAGE	Test not processed			None
Reset Frame	img_cal_reset	CALIB	BIAS	IMAGE	reset_combine	Exposure parameters	library reset frame	Mean reset
Dark Frame	img_cal_dark	CALIB	DARK	IMAGE	dark_combine	Exposure parameters	library dark frame	Mean dark
Dark Current	img_cal_darkcurrent	CALIB	DARK, DARKCURRENT	IMAGE	dark_current	Exposure parameters		Dark Current map
Persistence sky measure	img_cal_persistence	CALIB	OBJECT, PERSISTENCE	IMAGE	persistence_analyse	Exposure parameters WCS set	linearity channel table library dark frame library flat field	Persistence constants
Persistence dark measure		CALIB	DARK, PERSISTENCE	IMAGE		Exposure parameters		
Dome Flat	img_cal_domeflat	CALIB	FLAT, LAMP	IMAGE	dome_flat_combine	Exposure parameters	library bad-pixel map library dark frame linearity channel table	Mean Dome Flat Dome confidence map
Linearity Measure	img_cal_linearity	CALIB	FLAT, LAMP, LINEARITY	IMAGE	linearity_analyse	Exposure parameters	library dark frame channel map	Linearity channel table Bad pixel map

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	44 of 71

DATA FILE	VIRCAM_TEMPLATE	DRP CATG	DRP TYPE	DPR TECH	RECIPE	HEADER INPUTS	CALIB DB	PRODUCTS
Noise & Gain	img_cal_noisegain	CALIB	FLAT, LAMP, GAIN DARK, GAIN	IMAGE	detector_noise	Exposure parameters	linearity channel table	Noise and gain values
Twilight Flat	img_cal_twiflat	CALIB	FLAT, TWILIGHT DARK, TWILIGHT	IMAGE	twilight_combine	Exposure parameters	library bad-pixel map library dark frame linearity channel table	Mean twilight flat Sky confidence map Gain correction
Cross-Talk obs	img_cal_crosstalk	CALIB	OBJECT, CROSSTALK	IMAGE	crosstalk_analyse	Exposure parameters	library dark frame linearity channel table library flat field library confidence map persistence constants	cross-talk matrix
Mesostep sequence	img_cal_illumination	CALIB	STD, ILLUMINATION	IMAGE	mesostep_analyse	Exposure parameters WCS set	library dark frame linearity channel table library flat field library confidence map persistence constant crosstalk matrix library fringe map photometric catalogue	illumination map
Standard star field	img_cal_std	CALIB	STD, FLUX	IMAGE, JITTER	standard_process	Exposure parameters WCS set	library dark frame linearity channel table library flat field library confidence map persistence constants crosstalk matrix library fringe map photometric catalogue	photometric coefficients

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	45 of 71

DATA FILE	VIRCAM_TEMPLATE	DRP CATG	DRP TYPE	DPR TECH	RECIPE	HEADER INPUTS	CALIB DB	PRODUCTS
Pawprint	img_obs_paw	SCIENCE	OBJECT	IMAGE, JITTER	jitter_microstep_process	Exposure parameters WCS set	library dark frame linearity channel table library flat field library confidence map persistence constants library fringe map crosstalk matrix photometric catalogue	Reduced Paw Prints Associated confidence maps Object catalogues Sky map (e.g. for de-fringing, when input criteria met)
Pawprint Extd object		SCIENCE	OBJECT, EXTENDED	IMAGE, JITTER				
Tile	img_obs_tile	SCIENCE	OBJECT	IMAGE, JITTER	jitter_microstep_process			
Tile extended		SCIENCE	OBJECT, EXTENDED	IMAGE, JITTER				
non-standard tile pattern	img_obs_offsets	SCIENCE	OBJECT	IMAGE, JITTER	jitter_microstep_process			
non-standard tile of extended source		SCIENCE	OBJECT, EXTENDED	IMAGE, JITTER				

**Table 8-1 Relationship between Data Types, Observation Templates and Pipeline Recipes**

## **8.1 Imaging Calibration Templates**

### **8.1.1 Reset**

Name: Reset  
Identifier: VIRCAM\_img\_cal\_reset.tsf  
Description: Make a number of reset frames (reset-read only) with cold blank (a single reset/read sequence). Used with HOWFS and IMAGING mode.  
Parameters: number of reset frames  
Raw Frames: FITS  
Pipeline recipes: vircam\_reset\_combine

### **8.1.2 Dark**

Name: Dark  
Identifier: VIRCAM\_img\_cal\_dark.tsf  
Description: Make a number of dark exposures (reset-read-read) with cold blank  
Parameters: integration time, number of integrations, number of frames  
Raw Frames: FITS  
Pipeline recipes: vircam\_dark\_combine

### **8.1.3 Dark Current**

Name: Dark Current  
Identifier: VIRCAM\_img\_cal\_darkcurrent.tsf  
Description: Make a series of dark exposures at a variety of different exposure times  
Parameters: List of integration times, and corresponding numbers of integrations for determination of detector dark current.  
Raw Frames: Sequence of FITS files  
Pipeline recipes: vircam\_dark\_combine

### **8.1.4 Acquire Dome Screen**

Name: Dome Screen  
Identifier: VIRCAM\_img\_acq\_domescreen.tsf  
Description: Set instrument into IMAGING mode and select science filter. Move telescope to point at illuminated screen and switch on lamps.  
Parameters: Filter, illumination combination  
Raw Frames: None  
Pipeline recipes: None

### **8.1.5 Dome Flat**

Name: Dome Flat  
Identifier: VIRCAM\_img\_cal\_domeflat.tsf

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	47 of 71

Description: Make a dome flat exposure (or sequence of exposures) suitable for calibrating IMAGING mode observations. The flat-field lamps may be switched off when exposure is complete.

Parameters: Filter, list of integration times and corresponding numbers of integrations, switch calibration source off flag, lamp setting.

Raw Frames: FITS files

Pipeline recipes: vircam\_dome\_flat\_combine

### 8.1.6 Detector Linearity

Name: Linearity

Identifier: VIRCAM\_img\_cal\_linearity.tsf

Description: Make series of dome flat exposures and corresponding darks at a list of exposure times.

Parameters: Filter, List of integration times and corresponding numbers of integrations

Raw Frames: FITS files

Pipeline recipes: vircam\_linearity\_analyse

### 8.1.7 Noise and Gain

Name: Noisegain

Identifier: VIRCAM\_img\_cal\_noisegain.tsf

Description: Make two dark exposures followed by the same number of dome screen flat-field exposures with matched integration times and number of integrations.

Parameters: filter, optional: detector controller mode, list of integration times and corresponding number of integrations, lamp level, optional "switch off calibration source when finished".

Raw Frames: FITS Files

Pipeline recipes: vircam\_detector\_noise

### 8.1.8 Acquire Twilight Field

Name: Twilight

Identifier: VIRCAM\_img\_acq\_twilight.tsf


Description: Select a dusk or dawn twilight field (Figure 2-1). Track (no autoguiding).

Parameters: filter, acceptable Azimuth, Altitude range for search, moon avoidance distance, optional: Azimuth, Altitude, rotator position angle.

Raw Frames: None

Pipeline recipes: None

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	48 of 71

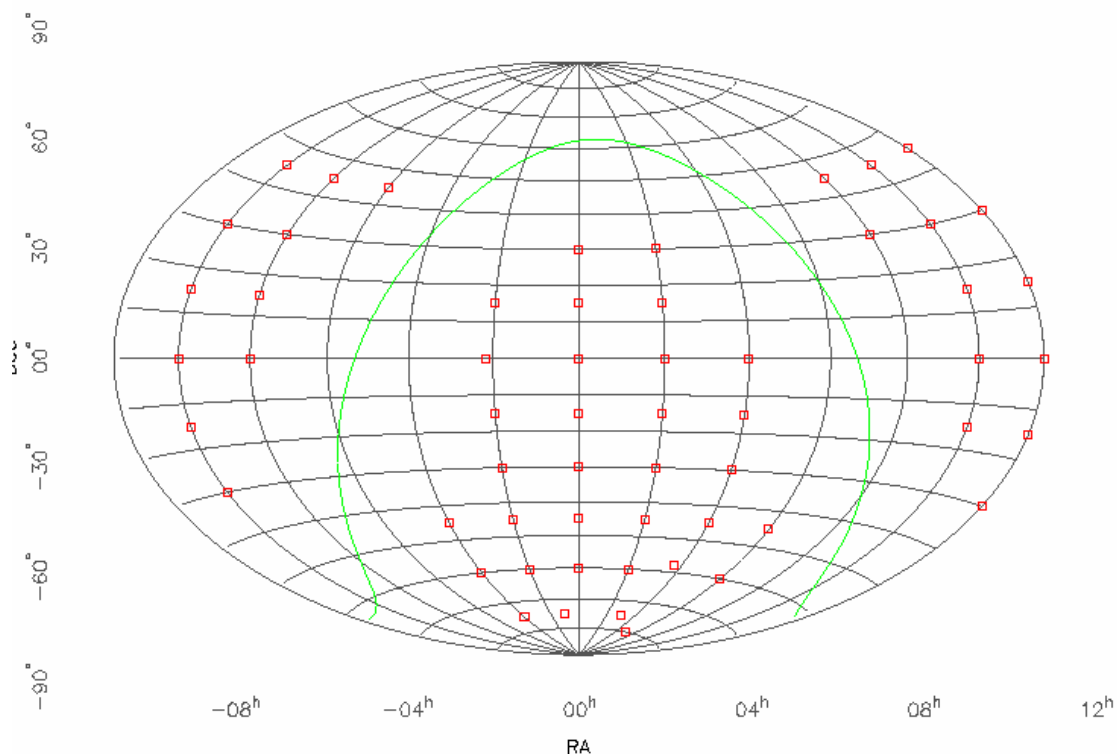

**Figure 8-2 Pre-selected twilight fields**

### 8.1.9 Twilight Flat

Name: Twilight Flat  
Identifier: VIRCAM\_img\_cal\_twiflat.tsf  
Description: Take a series of exposures sufficient to make a twilight sky flat-field, automatically determining exposure values. Move telescope in small offsets between integrations to reject bright stars.  
Parameters: List of integration times and corresponding numbers of integrations, or illumination level, depending on level of automation. Includes procedure to wait until sky brightness is appropriate, or abort if the time is too late (dusk and dawn).  
Raw Frames: FITS files  
Pipeline recipes: vircam\_twilight\_combine

### 8.1.10 Persistence

Name: Persistence  
Identifier: VIRCAM\_img\_cal\_persistence.tsf  
Description: Take one exposure with a selected science filter, followed by a series of dark exposures. All exposures have the same integration time and number of integrations. The field should contain a nearly-saturated star.  
Parameters: science filter, number of dark exposures, number of



<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	49 of 71

Raw Frames: exposures, integration time, number of integrations.  
 Pipeline recipes: FITS files  
 vircam\_persistence\_analyse

### 8.1.11 Astrometric Calibration

No specific astrometric calibration templates are required as all science frames will be calibrated according to the procedure described in 6.2.2.

### 8.1.12 Photometric Calibration Standard Fields

Name: Calibrate  
 Identifier: VIRCAM\_img\_cal\_std.tsf  
 Description: This template is identical to VIRCAM\_img\_obs\_paw.tsf (see 8.3.2 for full operational description) except for the insertion of FITS information indicating a photometric standard field (STANDARD = T). It is only necessary to observe a pawprint for calibration, a full tile is unnecessary.  
 Parameters: Number of filter positions F, and (if F>1) filter IDs;  
 Number of jitter positions J, Number of microstep positions M nested at each jitter position;  
 (if J > 1) jitter pattern ID, jitter scale factor, and (if M=1) at each jitter position integration time, number of integrations;  
 (if M > 1) microstep pattern ID, microstep scale factor, and at each microstep position the integration time, number of integrations.  
 Raw Frames: As many FITS files as there are exposures  
 Pipeline recipes: vircam\_standard\_process

### 8.1.13 Quick look

Name: quick look  
 Identifier: VIRCAM\_img\_obs\_exp.tsf  
 Description: Make a series of exposures at the same target position with a single filter, with no jittering or microstepping.  
 Parameters: science filter, number of exposures, integration time, number of integrations.  
 Raw Frames: FITS files  
 Pipeline recipes: None.

### 8.1.14 Cross-talk

Name: Cross-talk  
 Identifier: VIRCAM\_img\_cal\_crosstalk.tsf  
 Description: Make a series of exposures, with each exposure offset from the previous one by a sequence of meso-steps designed to place a bright star on each of the 16 readout channels on each detector.  
 Parameters: science filter, optional list of meso-step offsets, optional

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	50 of 71

detector mode, number of exposures, integration time, number of integrations.  
Raw Frames: FITS files  
Pipeline recipes: vircam\_crosstalk\_analyse

### 8.1.15 Illumination

Name: Illumination  
Identifier: VIRCAM\_img\_cal\_illumination.tsf  
Description: make a series of exposures, with each exposure offset from the previous one by a sequence of meso-steps designed to place a bright star at a regular grid of offset positions across each detector.  
Parameters: List of science filters, list of mesostep offsets, list of [guide star plus two aO stars] for each mesostep in the sequence, optional detector mode, number of exposures, integration time, number of integrations.  
Raw Frames: FITS files  
Pipeline recipes: vircam\_mesosteop\_analyse

## 8.2 HOWFS mode calibration

HOWFS processing is carried out on the Instrument Workstation, and data is not passed on to the pipeline.

### 8.2.1 HOWFS Acquire Dome Screen

Name: HOWFS Acquire Dome Screen  
Identifier: VIRCAM\_howfs\_acq\_domescreen.tsf  
Description: Set camera into HOWFS mode and select HOWFS intermediate filter. Move telescope to dome illuminated screen, set tracking off and set illumination level.  
Parameters: Filter, screen illumination lamp combination.  
Raw Frames: None  
IWS Procedures: No  
Pipeline recipes: None

### 8.2.2 HOWFS Reset

Name: HOWFS Reset  
Identifier: VIRCAM\_howfs\_cal\_reset.tsf  
Description: Make a series of reset exposures suitable for calibrating HOWFS observations.  
Parameters: Filter (Dark), number of frames.  
Raw Frames: FITS  
IWS Procedures: Yes  
Pipeline recipes: None

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	51 of 71

### 8.2.3 HOWFS Dark

Name: HOWFS Dark  
 Identifier: VIRCAM\_howfs\_cal\_dark.tsf  
 Description: Make several dark exposures suitable for calibrating HOWFS observations.  
 Parameters: Filter, integration time, number of integrations.  
 Raw Frames: FITS  
 IWS Procedures: Yes  
 Pipeline recipes: None

### 8.2.4 HOWFS Dome Flat

Name: HOWFS Dome Flat  
 Identifier: VIRCAM\_howfs\_cal\_domeflat.tsf  
 Description: Make a flat-field exposure (or exposures) suitable for calibrating HOWFS observations.  
 Parameters: Filter & illumination combination, integration time, number of integrations, focal plane X, Y, and detector window size.  
 Raw Frames: FITS  
 IWS Procedures: Yes  
 Pipeline recipes: None

## 8.3 Imaging Mode Science Templates

The nesting of the observing loops is described in the same way as in the URD [AD2] using a shorthand based on the order of nesting of the loops for the 6 components, (F for filter, T for tile, P for pawprint, J for jitter, M for microstep, E for exposure), with the order of the letters indicating increasing nesting of the loop as one reads to the right.

### 8.3.1 Acquire

Name: **Acquire**  
 Identifier: VIRCAM\_img\_acq.tsf  
 Description: Acquire single target.  
 Check/Set camera to IMAGING mode, check/set camera position angle, check/select first science filter, all in parallel with a preset of telescope to new target, optionally (and usually) guide, optionally (and usually) activate LOWFS. The flat-field lamp is checked and automatically switched off when the telescope presets to a new celestial target.  
 i.e. nest  
 Preset to defined position  
 Check/Set IMAGING mode in parallel  
 Check/Set camera PA in parallel [default +X axis to +RA]  
 Check/Set first filter in parallel  
 If guiding required

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	52 of 71

Acquire guide star  
LOWFS on two stars in parallel

Parameters: Target coordinates,  
focal plane position to be at target position [e.g. centre of camera (default), or specified offset from centre of camera, or centre of a specified detector],  
camera position angle (E of N on sky, defaults to give +X to +RA),  
first filter,  
autoguiding required flag, if set (default) coordinates for 1 guide star from the SDT,  
LOWFS required flag, if set (default) 1 pair LOWFS stars found by the SDT.

Raw Frames: None

Pipeline recipes: None

### 8.3.2 Observe Paw

Name: Observe

Identifier: VIRCAM\_img\_obs\_paw.tsf

Description: This template makes one “pawprint” observation using a selection of filter changes, jittering and microstep movements. It is assumed the telescope has already been positioned at the target using the acquisition template. The detector controller is configured with the required readout and exposure times and the following sequence executed:  
**FJME** -- step through science filters in outer loop. At each science filter execute a jitter pattern (if specified), and within each jitter pattern execute a microstep pattern (if specified)

Parameters: List of science filters  
Number of jitter positions, [optional: jitter pattern ID, jitter scale factor]  
Number of microstep patterns, [optional: microstep pattern ID, microstep scale factor]  
Number of exposures  
Integration time  
Number of integrations  
[optional: New camera-position angle]

Raw Frames: As many FITS files as there are exposures

Pipeline recipes: vircam\_jitter\_microstep\_process

Note: The pipeline handles microstepped and jittered exposures differently.  
To just perform exposures at a fixed position set J=1 and M=1  
To just perform a jitter pattern with no microsteps set M=1  
To just perform a microstep pattern with no jitters set J=1

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	53 of 71

### 8.3.3 Observe Tile

Name: Observe Tile  
Identifier: VIRCAM\_img\_obs\_tile.tsf  
Description: This template makes sufficient observations to generate a contiguous “tile”, using a selection of pawprints, filter changes, jittering and microstep movements. It is assumed the telescope has already been pointed to the null target with the acquisition template. The detector controller is configured with the required readout and exposure time parameters and one of the following sequences executed:  
**FPJME** – Construct the tile from a series of pawprints, repeating each pawprint with a different science filter. Within each pawprint execute a jitter pattern (if specified), and within each jitter pattern execute a microstep pattern (if specified).  
**PFJME** – Construct the tile from a series of pawprints. Within each pawprint execute a jitter pattern, except, this time repeat each jitter with a different science filter before moving on to the next. Within each jitter, execute a microstep pattern (if specified).  
**FJPME** – Construct the tile from a pawprint and jitter pattern such that one jitter observation is made from each pawprint in turn. Within each jitter pattern there can be a microstep pattern. The whole sequence may be repeated with different science filters.

Each time a new pawprint is selected, the TCS is provided with a new guide star and a new pair of LOWFS stars, taken from the list provided by the template.

i.e. nest **FPJME**  
For each Filter  
  For each pawprint position (1 to P)  
    Check/offset telescope (steps 5-10’)  
    Acquire new guide and LOWFS stars  
    For each jitter position (1 to J)  
      Check/Move telescope (steps <30”, same guide star)  
      For each microstep (1 to M)  
        Check/Move telescope (steps <3”, same guide star)  
        For each exposure (1 to E)  
          Make exposure  
          Next exposure  
        Next microstep  
      Next jitter  
    Next pawprint  
  Next Filter

Parameters: Nesting pattern (FPJME, PFJME or FJPME as above)  
List of science filters  
Tile pattern ID, tile scale factor

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	54 of 71

List of [guide star plus two HOWFS stars] for each pawprint in the tile pattern  
Number of jitter positions, [optional: jitter pattern ID, jitter scale factor],  
Number of microstep positions, [optional: microstep pattern ID, microstep scale factor]  
Number of exposures  
Integration time  
Number of integrations  
Raw Frames: As many FITS files as there are exposures  
Pipeline Recipes: `vircam_jitter_microstep_process`  
Note: The pipeline handles microstepped and jittered exposures in a different way.

### 8.3.4 Observe Offsets

Name: **Observe Offsets**  
Identifier: `VIRCAM_img_obs_offsets.tsf`  
Description: Similar to **Observe Tile** except the offsets are not limited to a set of pre-defined offset patterns. The purpose is to allow the versatility of more general sets of offsets, rather than those offset pattern that have been predefined for produce a simple tile.  
Parameters: List of science filters  
Tile pattern ID  
Tile scale factor  
List of [guide star plus two LOWFS stars] for each offset  
List of RA, Dec offsets  
Number of exposures  
Integration time  
Number of integrations  
[optional: list of position-angle offsets]  
Raw Frames: (Number of pawprint locations  $\times$  number of exposure in each pawprint) FITS files  
Pipeline recipes: `vircam_jitter_microstep_process`  
Note: Pipeline produces pawprints, these are not merged.

### 8.3.5 Observing a set of Tiles

Three templates (FTPJME, TFPJME and TPFJME) that observe more than one tile were outlined in the URD [AD2]. The template design has now been considerably streamlined such that the required behaviour can be realised with the observe-tile template, or with multiple templates within an OB.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	55 of 71

## 8.4 HOWFS mode data

HOWFS processing is carried out on the Instrument Workstation, and data is not passed on to the pipeline.

### 8.4.1 HOWFS Acquire

Name: HOWFS Acquire  
Identifier: VIRCAM\_howfs\_acq.tsf  
Description: Acquire a HOWFS (High-Order Wave Front Sensor) source. Set instrument into HOWFS mode which selects HOWFS intermediate filter. If guiding and LOWFS are required, set guide star and two LOWFS coordinate sets.  
Parameters: HOWFS filter  
Target coordinates and camera position angle  
[optionally: guide star, two LOWFS stars]  
focal plane X,Y  
Raw frames: None  
IWS Procedures: None  
Pipeline recipes: None

### 8.4.2 HOWFS Wave front

Name: HOWFS wave front  
Identifier: VIRCAM\_howfs\_obs\_wfront.tsf  
Description: Make a HOWFS wave front measurement for measuring the current residual from the active optics lookup table. This will typically be done only ~ twice per night, once at the start of the night, and once around midnight if necessary.  
Parameters: HOWFS filter  
focal plane X,Y and detector window size  
integration time  
number of integrations  
[optional: max iterations, number of coefficients, name of file]  
Raw Frames: FITS  
IWS Procedures: Trigger HOWFS analysis system, forward coefficient residuals to TCS  
Pipeline recipes: None

### 8.4.3 HOWFS Expose

Name: HOWFS Expose  
Identifier: VIRCAM\_howfs\_obs\_exp.tsf

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	56 of 71

Description: Make a HOWFS wave front measurement suitable for populating the active optics lookup tables in the TCS. This will be done only very occasionally [~quarterly] in engineering time and does not form part of the routine operations.

Parameters: HOWFS filter  
focal plane X,Y and detector window size  
integration time  
number of integrations  
[optional: max iterations, number of coefficients, name of file]

Raw Frames: FITS

IWS Procedures: Trigger HOWFS analysis system, produce look up table.

Pipeline recipes: None

### **8.5 Instrument Health Templates**

Instrument health monitoring templates are defined in [RD5] and are run on a regular basis. For example the instrument filter wheel is tested regularly for position repeatability, and this may determine how often to repeat a flat-field calibration with a particular science filter. The templates in [RD5] are not repeated here, since these monitoring outputs are not processed by the VISTA pipeline and hence are not described in this Calibration Plan.




<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	57 of 71

## 9 Technical Programs

### 9.1 TP-VIS1: Establishment of Secondary Standard Fields

This section outlines the procedures required to establish a network of secondary standard fields early in the operation of VIRCAM.

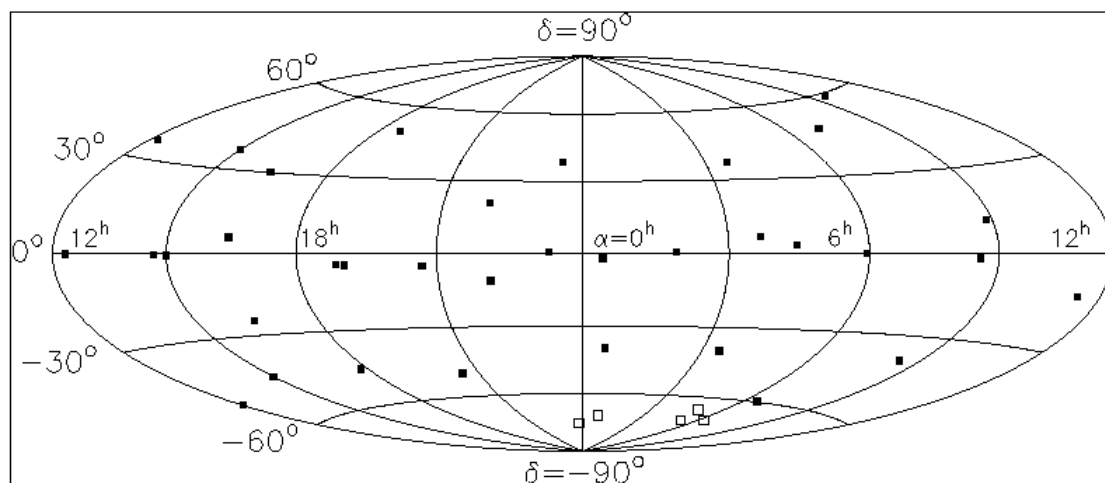

**Figure 9-1** Distribution of the 2MASS touchstone fields on the sky

- Name: Secondary Standard Fields
- Program Identifier: TP-VIS1-IMA-PHO-0001
- Purpose: Provide secondary standards for VISTA for routine calibrations (see Section 5)
- Description: A programme of observations around the primary standards is required to make direct measurements of all the secondary standards in the VIRCAM filter system. These observations will be repeated throughout the year to minimize the errors in the secondary star measurements, to identify variables, and to provide full coverage in Right Ascension. These fields are chosen to ensure photometric pedigree and are drawn from the list of 2MASS touchstone fields [RD9] and from published lists of photometric standards ([RD10],[RD11],[RD16]). Many of these fields are also WFCAM calibration fields. The secondary standard fields are tabulated in Appendix A.
- Observing Conditions: Photometric
- Frequency: Complete night at quarterly intervals over first 2 years of VIRCAM operations to ensure the photometric pedigree and accuracy of the standard fields
- Special Conditions: None
- Analysis procedure: A master catalogue of standard stars will be derived for each field with photometry in each of the VIRCAM filters.

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	58 of 71

Photometry will be measured using standard VFDS pipeline procedures [RD1].

Products: Z, Y, J, H, K<sub>S</sub> magnitudes of ~1500 secondary standards in each field

Accuracies: The target is 0.005 magnitude *rms* for secondary standards in each waveband after two years of repeated observations.

Responsible Person: JPE

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	59 of 71

## 10 Format of Data Frames

### 10.1 Principle

There is only one data format, used in both IMAGING and HOWFS modes. Data frames will be in ESO modified standard FITS format [RD12], the ESO modifications being limited to the *hierarchical header* proposal. The headers are compliant with the final World Coordinate System (WCS) specification [RD13]. Data from the full set of chips is stored in Multi Extension Format (MEF) as 32-bit signed integers [RD12], each extension corresponding to a particular detector. Offset 16-bit format is not used because data will be co-added in the data acquisition system before output. Though not a requirement, the integer format enables the use of highly efficient lossless compression.

### 10.2 Model FITS header

A model FITS header for raw data is presented in Table 10-1. In addition to the header shown in the model, standard pipeline-processing keywords will be inserted into the data products.

---

```

SIMPLE =                               T / Standard FITS format (NOST-100.0)
BITPIX =                               8 / # of bits storing pix values
NAXIS  =                               0 / # of axes in frame
EXTEND  =                               T / Extension may be present
ORIGIN  = 'ESO                          ' / European Southern Observatory
DATE    = '2006-03-21T15:06:48'         / Date this file was written
TELESCOP= 'VISTA                        ' / ESO Telescope Name
INSTRUME= 'VIRCAM                       ' / Instrument used.
OBJECT  = 'OBJECT                       ' / Original target.
RA      =          318.346792           / 21:13:23.2 RA (J2000) pointing (deg)
DEC     =          -88.93761            / -88:56:15.3 DEC (J2000) pointing (deg)
EQUINOX =          2000.                / Standard FK5 (years)
RADECSYS= 'FK5                          ' / Coordinate reference frame
EXPTIME =          10.0000000           / Integration time
MJD-OBS =          53815.62973579       / Obs start
DATE-OBS= '2006-03-21T15:06:49.1726'    / Observing date
UTC     =          54270.829            / 15:04:30.829 UTC at start (sec)
LST     =          80333.420            / 22:18:53.420 LST at start (sec)
PI-COI  = 'J.Lewis-P.Bunclark'         / PI-COI name.
OBSERVER= 'Peter Bunclark'             / Name of observer.
ORIGFILE= 'VIRCAM_IMG_OBS080_0001.fits' / Original File Name
COMMENT VISTA IR Camera OS $Revision: 0.21 $
HIERARCH ESO ADA ABSROT END =          0.00000 / Abs rot angle at exp end (deg)
HIERARCH ESO DPR CATG      = 'TEST      ' / Observation category
HIERARCH ESO DPR TECH      = 'IMAGE,FILTOFFSET' / Observation technique
HIERARCH ESO DPR TYPE      = 'STD,STRAYLIGHT' / Observation type
HIERARCH ESO INS DATE      = '2005-12-14' / Instrument release date (yyyy-mm-d)
HIERARCH ESO INS FILT1 DATE = '2006-01-27T10:02:27' / Filter index time
HIERARCH ESO INS FILT1 FOCUS =          0.000 / Filter focus offset [mm]
HIERARCH ESO INS FILT1 ID   = 'SLOT8    ' / Filter unique id
HIERARCH ESO INS FILT1 NAME = 'Y        ' / Filter name
HIERARCH ESO INS FILT1 NO   =          25 / Filter wheel position index
HIERARCH ESO INS FILT1 WLEN =          0.000 / Filter effective wavelength [nm]
HIERARCH ESO INS HBI SWSIM =          F / If T, heart beat device simulated
HIERARCH ESO INS ID        = 'VIRCAM/1.56' / Instrument ID
HIERARCH ESO INS LSC1 OK   =          T / If T, controller is operational
HIERARCH ESO INS LSC1 SWSIM =          F / If T, lakeshore ctrllr simulated
HIERARCH ESO INS LSM1 OK   =          T / If T, controller is operational
HIERARCH ESO INS LSM1 SWSIM =          F / If T, lakeshore monitor simulated
HIERARCH ESO INS LSM2 OK   =          T / If T, controller is operational
HIERARCH ESO INS LSM2 SWSIM =          F / If T, lakeshore monitor simulated

```

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	60 of 71

HIERARCH ESO INS LSM3 OK = T / If T, controller is operational  
 HIERARCH ESO INS LSM3 SWSIM = F / If T, lakeshore monitor simulated  
 HIERARCH ESO INS PRES1 ID = 'Vac1 ' / Pressure sensor type  
 HIERARCH ESO INS PRES1 NAME = 'Vacuum gauge 1' / Pressure sensor name  
 HIERARCH ESO INS PRES1 UNIT = 'mbar ' / Pressure unit  
 HIERARCH ESO INS PRES1 VAL = 0.000 / Pressure [mbar]  
 HIERARCH ESO INS SW1 ID = 'INPOS ' / Switch ID  
 HIERARCH ESO INS SW1 NAME = 'Filter In-position Switch' / Switch name  
 HIERARCH ESO INS SW1 STATUS = 'INACTIVE' / Switch status  
 HIERARCH ESO INS SW2 ID = 'REFSW ' / Switch ID  
 HIERARCH ESO INS SW2 NAME = 'Filter Reference Select' / Switch name  
 HIERARCH ESO INS SW2 STATUS = 'PRIMARY ' / Switch status  
 HIERARCH ESO INS SW3 ID = 'HOME ' / Switch ID  
 HIERARCH ESO INS SW3 NAME = 'Filter Reference Switch' / Switch name  
 HIERARCH ESO INS SW3 STATUS = 'INACTIVE' / Switch status  
 HIERARCH ESO INS TEMP1 ID = 'Amb ' / Temperature sensor type  
 HIERARCH ESO INS TEMP1 NAME = 'Ambient temperature' / Temperature sensor name  
 HIERARCH ESO INS TEMP1 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP1 VAL = 302.580 / Temperature [K]  
 HIERARCH ESO INS TEMP10 ID = 'CC1\_2 ' / Temperature sensor type  
 HIERARCH ESO INS TEMP10 NAME = 'Cryo cooler 1 2nd' / Temperature sensor name  
 HIERARCH ESO INS TEMP10 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP10 VAL = 24.105 / Temperature [K]  
 HIERARCH ESO INS TEMP12 ID = 'CC2\_2 ' / Temperature sensor type  
 HIERARCH ESO INS TEMP12 NAME = 'Cryo cooler 2 2nd' / Temperature sensor name  
 HIERARCH ESO INS TEMP12 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP12 VAL = 27.791 / Temperature [K]  
 HIERARCH ESO INS TEMP14 ID = 'CC3\_2 ' / Temperature sensor type  
 HIERARCH ESO INS TEMP14 NAME = 'Cryo cooler 3 2nd' / Temperature sensor name  
 HIERARCH ESO INS TEMP14 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP14 VAL = 22.735 / Temperature [K]  
 HIERARCH ESO INS TEMP15 ID = 'WFSN ' / Temperature sensor type  
 HIERARCH ESO INS TEMP15 NAME = 'WFS CCD assembly PY' / Temperature sensor name  
 HIERARCH ESO INS TEMP15 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP15 VAL = 1.000 / Temperature [K]  
 HIERARCH ESO INS TEMP16 ID = 'WFSS ' / Temperature sensor type  
 HIERARCH ESO INS TEMP16 NAME = 'WFS CCD assembly NY' / Temperature sensor name  
 HIERARCH ESO INS TEMP16 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP16 VAL = 123.550 / Temperature [K]  
 HIERARCH ESO INS TEMP17 ID = 'Dt1LAB ' / Temperature sensor type  
 HIERARCH ESO INS TEMP17 NAME = 'Science detector 1AB' / Temperature sensor name  
 HIERARCH ESO INS TEMP17 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP17 VAL = 73.583 / Temperature [K]  
 HIERARCH ESO INS TEMP18 ID = 'Dt1CD ' / Temperature sensor type  
 HIERARCH ESO INS TEMP18 NAME = 'Science detector 1CD' / Temperature sensor name  
 HIERARCH ESO INS TEMP18 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP18 VAL = 73.002 / Temperature [K]  
 HIERARCH ESO INS TEMP19 ID = 'Dt2BA ' / Temperature sensor type  
 HIERARCH ESO INS TEMP19 NAME = 'Science detector 2BA' / Temperature sensor name  
 HIERARCH ESO INS TEMP19 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP19 VAL = 74.668 / Temperature [K]  
 HIERARCH ESO INS TEMP2 ID = 'Win ' / Temperature sensor type  
 HIERARCH ESO INS TEMP2 NAME = 'Cryostat window cell' / Temperature sensor name  
 HIERARCH ESO INS TEMP2 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP2 VAL = 176.710 / Temperature [K]  
 HIERARCH ESO INS TEMP20 ID = 'Dt2DC ' / Temperature sensor type  
 HIERARCH ESO INS TEMP20 NAME = 'Science detector 2DC' / Temperature sensor name  
 HIERARCH ESO INS TEMP20 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP20 VAL = 74.106 / Temperature [K]  
 HIERARCH ESO INS TEMP21 ID = 'Dt3AB ' / Temperature sensor type  
 HIERARCH ESO INS TEMP21 NAME = 'Science detector 3AB' / Temperature sensor name  
 HIERARCH ESO INS TEMP21 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP21 VAL = 74.677 / Temperature [K]  
 HIERARCH ESO INS TEMP22 ID = 'Dt3CD ' / Temperature sensor type  
 HIERARCH ESO INS TEMP22 NAME = 'Science detector 3CD' / Temperature sensor name  
 HIERARCH ESO INS TEMP22 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP22 VAL = 75.485 / Temperature [K]  
 HIERARCH ESO INS TEMP23 ID = 'Dt4BA ' / Temperature sensor type  
 HIERARCH ESO INS TEMP23 NAME = 'Science detector 4BA' / Temperature sensor name  
 HIERARCH ESO INS TEMP23 UNIT = 'K ' / Temperature unit  
 HIERARCH ESO INS TEMP23 VAL = 74.778 / Temperature [K]  
 HIERARCH ESO INS TEMP24 ID = 'Dt4DC ' / Temperature sensor type  
 HIERARCH ESO INS TEMP24 NAME = 'Science detector 4DC' / Temperature sensor name

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	61 of 71

```

HIERARCH ESO INS TEMP24 UNIT = 'K' / Temperature unit
HIERARCH ESO INS TEMP24 VAL = 74.544 / Temperature [K]
HIERARCH ESO INS TEMP25 ID = 'FPA' / Temperature sensor type
HIERARCH ESO INS TEMP25 NAME = 'FPA thermal plate' / Temperature sensor name
HIERARCH ESO INS TEMP25 UNIT = 'K' / Temperature unit
HIERARCH ESO INS TEMP25 VAL = 69.997 / Temperature [K]
HIERARCH ESO INS TEMP26 ID = 'WFSpl' / Temperature sensor type
HIERARCH ESO INS TEMP26 NAME = 'WFS plate' / Temperature sensor name
HIERARCH ESO INS TEMP26 UNIT = 'K' / Temperature unit
HIERARCH ESO INS TEMP26 VAL = 108.360 / Temperature [K]
HIERARCH ESO INS TEMP3 ID = 'Tube' / Temperature sensor type
HIERARCH ESO INS TEMP3 NAME = 'Cryostat tube' / Temperature sensor name
HIERARCH ESO INS TEMP3 UNIT = 'K' / Temperature unit
HIERARCH ESO INS TEMP3 VAL = 33.256 / Temperature [K]
HIERARCH ESO INS TEMP4 ID = 'LNtnk' / Temperature sensor type
HIERARCH ESO INS TEMP4 NAME = 'Liquid nitrogen tank' / Temperature sensor name
HIERARCH ESO INS TEMP4 UNIT = 'K' / Temperature unit
HIERARCH ESO INS TEMP4 VAL = 103.180 / Temperature [K]
HIERARCH ESO INS TEMP5 ID = 'Baff' / Temperature sensor type
HIERARCH ESO INS TEMP5 NAME = 'Baffle' / Temperature sensor name
HIERARCH ESO INS TEMP5 UNIT = 'K' / Temperature unit
HIERARCH ESO INS TEMP5 VAL = 21.332 / Temperature [K]
HIERARCH ESO INS TEMP6 ID = 'Lens' / Temperature sensor type
HIERARCH ESO INS TEMP6 NAME = 'Lens barrel' / Temperature sensor name
HIERARCH ESO INS TEMP6 UNIT = 'K' / Temperature unit
HIERARCH ESO INS TEMP6 VAL = 100.570 / Temperature [K]
HIERARCH ESO INS TEMP7 ID = 'FwShd' / Temperature sensor type
HIERARCH ESO INS TEMP7 NAME = 'Filter wheel shield' / Temperature sensor name
HIERARCH ESO INS TEMP7 UNIT = 'K' / Temperature unit
HIERARCH ESO INS TEMP7 VAL = 124.420 / Temperature [K]
HIERARCH ESO INS TEMP8 ID = 'FwHub' / Temperature sensor type
HIERARCH ESO INS TEMP8 NAME = 'Filter wheel hub' / Temperature sensor name
HIERARCH ESO INS TEMP8 UNIT = 'K' / Temperature unit
HIERARCH ESO INS TEMP8 VAL = 109.570 / Temperature [K]
HIERARCH ESO INS THERMAL DET MEAN= 0.00 / Detector mean temperature [K]
HIERARCH ESO INS THERMAL DET TARGET= 70.00 / Detector target temperature [K]
HIERARCH ESO INS THERMAL ENABLE= F / If T, enable thermal control
HIERARCH ESO INS VAC1 OK = T / If T, controller is operational
HIERARCH ESO INS VAC1 SWSIM = F / If T, vacuum sensor simulated
HIERARCH ESO OBS DID = 'ESO-VLT-DIC.OBS-1.11' / OBS Dictionary
HIERARCH ESO OBS GRP = '0' / linked blocks
HIERARCH ESO OBS ID = -1 / Observation block ID
HIERARCH ESO OBS NAME = 'Maintenance' / OB name
HIERARCH ESO OBS PI-COI ID = 0 / ESO internal PI-COI ID
HIERARCH ESO OBS PI-COI NAME = 'M.Caldwell-A.Born' / PI-COI name
HIERARCH ESO OBS PROG ID = 'Maintenance' / ESO program identification
HIERARCH ESO OBS START = '2006-01-30T13:54:10' / OB start time
HIERARCH ESO OBS TPLNO = 1 / Template number within OB
HIERARCH ESO OCS DET1 IMGNAME= 'VIRCAM_GEN_STD' / Data File Name.
HIERARCH ESO OCS RECIPE = 'DEFAULT' / Data reduction recipe to be used
HIERARCH ESO OCS REQTIME = 10.000 / Requested integration time [s]
HIERARCH ESO TEL ABSROT START= 0.000 / Abs rotator angle at start
HIERARCH ESO TEL AIRM END = 0.000 / Airmass at end
HIERARCH ESO TEL AIRM START = 0.000 / Airmass at start
HIERARCH ESO TEL ALT = 25.691 / Alt angle at start (deg)
HIERARCH ESO TEL AMBI FWHM END= -1.00 / Observatory Seeing queried from AS
HIERARCH ESO TEL AMBI FWHM START= -1.00 / Observatory Seeing queried from AS
HIERARCH ESO TEL AMBI PRES END= 750.00 / Observatory ambient air pressure q
HIERARCH ESO TEL AMBI PRES START= 750.00 / Observatory ambient air pressure q
HIERARCH ESO TEL AMBI RHUM = 12. / Observatory ambient relative humi
HIERARCH ESO TEL AMBI TAU0 = 0.000000 / Average coherence time
HIERARCH ESO TEL AMBI TEMP = 10.00 / Observatory ambient temperature qu
HIERARCH ESO TEL AMBI WINDDIR= 0. / Observatory ambient wind directio
HIERARCH ESO TEL AMBI WINDSP = 10.00 / Observatory ambient wind speed que
HIERARCH ESO TEL AO ALT = 0.000000 / Altitude of last closed loop a0
HIERARCH ESO TEL AO DATE = ' ' / Last closed loop a0
HIERARCH ESO TEL AO M1 DATE = '2006-03-21T15:06:47' / Last M1 update
HIERARCH ESO TEL AO M2 DATE = '2006-03-21T15:06:46' / Last M2 update
HIERARCH ESO TEL AO MODES = 0 / Which a0 modes corrected closed lo
HIERARCH ESO TEL AZ = 0.317 / Az angle at start (deg) S=0,W=90
HIERARCH ESO TEL DATE = 'not set' / TCS installation date
HIERARCH ESO TEL DID = 'ESO-VLT-DIC.TCS-01.00' / Data dictionary for TEL
HIERARCH ESO TEL DID1 = 'ESO-VLT-DIC.VTCS-0.2' / Additional data dict. fo

```

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	62 of 71

```

HIERARCH ESO TEL DOME STATUS = 'FULLY-OPEN' / Dome status
HIERARCH ESO TEL ECS FLATFIELD=          0 / Flat field level
HIERARCH ESO TEL ECS MOONSCR =          0.00 / Moon screen position
HIERARCH ESO TEL ECS VENT1 =          0.00 / State of vent i
HIERARCH ESO TEL ECS VENT2 =          0.00 / State of vent i
HIERARCH ESO TEL ECS VENT3 =          0.00 / State of vent i
HIERARCH ESO TEL ECS WINDSCR =          0.00 / Wind screen position
HIERARCH ESO TEL FOCU ID = 'CA ' / Telescope focus station ID
HIERARCH ESO TEL FOCU VALUE =          0.000 / M2 setting (mm)
HIERARCH ESO TEL GEOELEV =          2530. / Elevation above sea level (m)
HIERARCH ESO TEL GEOLAT =         -24.6157 / Tel geo latitude (+=North) (deg)
HIERARCH ESO TEL GEOLON =         -70.3976 / Tel geo longitude (+=East) (deg)
HIERARCH ESO TEL GUID FWHM =          0.00 / Seeing measured by autoguider
HIERARCH ESO TEL GUID STATUS = 'OFF ' / Status of autoguider
HIERARCH ESO TEL ID = 'v 0.44 ' / TCS version number
HIERARCH ESO TEL M2 ACENTRE =          0.00 / M2 centring alpha
HIERARCH ESO TEL M2 ATILT =          0.00 / M2 tilt alpha
HIERARCH ESO TEL M2 BCENTRE =          0.00 / M2 centring beta
HIERARCH ESO TEL M2 BTILT =          0.00 / M2 tilt beta
HIERARCH ESO TEL M2 Z =          0.00000 / Focussing position of M2 in Z coor
HIERARCH ESO TEL MOON DEC =         -27.46744 / -27:28:02.7 DEC (J2000) (deg)
HIERARCH ESO TEL MOON RA =         253.667459 / 16:54:40.1 RA (J2000) (deg)
HIERARCH ESO TEL OPER = 'Operator name not set' / Telescope Operator
HIERARCH ESO TEL PARANG END =          0.000 / Parallax angle at end (deg)
HIERARCH ESO TEL PARANG START=        0.000 / Parallax angle at start (deg)
HIERARCH ESO TEL POSANG =          0.000 / Rot position angle at start
HIERARCH ESO TEL TARG ALPHA =    211323.230 / Alpha coordinate for the target
HIERARCH ESO TEL TARG COORDTYPE= 'M ' / Coordinate type (M=mean A=apparent)
HIERARCH ESO TEL TARG DELTA =   -885615.400 / Delta coordinate for the target
HIERARCH ESO TEL TARG EPOCH =        2000.000 / Epoch
HIERARCH ESO TEL TARG EPOCHSYSTEM= 'J ' / Epoch system (default J=Julian)
HIERARCH ESO TEL TARG EQUINOX=        2000.000 / Equinox
HIERARCH ESO TEL TARG PARALLAX=        0.000 / Parallax
HIERARCH ESO TEL TARG PMA =          0.000000 / Proper Motion Alpha
HIERARCH ESO TEL TARG PMD =          0.000000 / Proper motion Delta
HIERARCH ESO TEL TARG RADVEL =          0.000 / Radial velocity
HIERARCH ESO TEL TH M1 TEMP =          0.00 / M1 superficial temperature
HIERARCH ESO TEL TH STR TEMP =          0.00 / Telescope structure temperature
HIERARCH ESO TEL TRAK STATUS = 'NORMAL ' / Tracking status
HIERARCH ESO TPL DID = 'ESO-VLT-DIC.TPL-1.9' / Data dictionary for TPL
HIERARCH ESO TPL EXPNO =          1 / Exposure number within template
HIERARCH ESO TPL ID = 'VIRCAM_gen_tec_StrayLight' / Template signature
HIERARCH ESO TPL NAME = 'VIRCAM stray light investigation' / Template name
HIERARCH ESO TPL NEXP =          6 / Number of exposures within template
HIERARCH ESO TPL PRESEQ = 'VIRCAM_gen_tec_StrayLight.seq' / Sequencer script
HIERARCH ESO TPL START = '2006-01-30T13:54:10' / TPL start time
HIERARCH ESO TPL VERSION = '$Revision: 0.13 $' / Version of the template
NJITTER =          0 / Number of jitter positions
NOFFSETS=          0 / Number of offset positions
NUSTEP =          0 / Number of microstep positions
OBSNUM =          1 / Observation number
REQTIME =          10.000 / Requested integration time [s]
END

```

```

XTENSION= 'IMAGE ' / IMAGE extension
BITPIX =          32 / # of bits per pix value
NAXIS =          2 / # of axes in data array
NAXIS1 =         2048 / # of pixels in axis1
NAXIS2 =         2048 / # of pixels in axis2
PCOUNT =          0 / number of random group parameters
GCOUNT =          1 / number of random groups
EXTNAME = 'DET1.CHIP9' / Extension name
EXTVER = 1 / Extension version
ORIGIN = 'ESO ' / European Southern Observatory
DATE = '2006-01-30T13:54:47.7333' / Date the file was written
EXPTIME =          10.000000 / Integration time
MJD-OBS =          53765.57956362 / Obs start 2006-01-30T13:54:34.297
DATE-OBS= '2006-01-30T13:54:34.2967' / Observing date
CTYPE1 = 'RA---ZPN' / Coord type of celestial axis 1
CTYPE2 = 'DEC--ZPN' / Coord type of celestial axis 2
CRVAL1 = 318.346791667 / RA at reference pixel
CRVAL2 = -88.9376111111 / Dec at reference pixel
CRPIX1 =          5401.6 / Pixel coordinate at ref point

```

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	63 of 71

```

CRPIX2 = 6860.8 / Pixel coordinate at ref point
CDELT1 = 9.494444444444444E-05 / Coordinate increment
CDELT2 = -9.494444444444444E-05 / Coordinate increment
CD1_1 = 5.81347849634012E-21 / WCS transform matrix element
CD1_2 = 9.494444444444444E-05 / WCS transform matrix element
CD2_1 = -9.494444444444444E-05 / WCS transform matrix element
CD2_2 = -5.81347849634012E-21 / WCS transform matrix element
HIERARCH ESO DET CHIP ID = 'ESO-Virgo45' / Detector ID
HIERARCH ESO DET CHIP LIVE = T / Detector live or broken
HIERARCH ESO DET CHIP NAME = 'Virgo' / Detector name
HIERARCH ESO DET CHIP NO = 9 / Unique Detector Number
HIERARCH ESO DET CHIP NX = 2048 / Pixels in X
HIERARCH ESO DET CHIP NY = 2048 / Pixels in Y
HIERARCH ESO DET CHIP PXSPACE= 2.000e-05 / Pixel-Pixel Spacing
HIERARCH ESO DET CHIP TYPE = 'IR' / The Type of Det Chip
HIERARCH ESO DET CHIP VIGNETD = F / Detector chip vignetted?
HIERARCH ESO DET CHIP X = 3 / Detector position x-axis
HIERARCH ESO DET CHIP Y = 4 / Detector position y-axis
HIERARCH ESO DET CHOP FREQ = 0 / Chopping Frequency
HIERARCH ESO DET CON OPMODE = 'NORMAL' / Operational Mode
HIERARCH ESO DET DID = 'ESO-VLT-DIC.IRACE-1.34' / Dictionary Name and Re
HIERARCH ESO DET DIT = 10.0000000 / Integration Time
HIERARCH ESO DET DITDELAY = 0.000 / Pause Between DITs
HIERARCH ESO DET EXP NAME = 'VIRCAM_GEN_STD030_0001' / Exposure Name
HIERARCH ESO DET EXP NO = 3 / Exposure number
HIERARCH ESO DET EXP UTC = '2006-01-30T13:54:47.7333' / File Creation Time
HIERARCH ESO DET FRAM NO = 1 / Frame number
HIERARCH ESO DET FRAM TYPE = 'INT' / Frame type
HIERARCH ESO DET FRAM UTC = '2006-01-30T13:54:46.7037' / Time Recv Frame
HIERARCH ESO DET IRACE ADC1 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC1 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC1 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC1 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC1 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC1 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC10 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC10 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC10 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC10 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC10 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC10 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC11 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC11 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC11 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC11 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC11 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC11 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC12 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC12 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC12 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC12 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC12 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC12 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC13 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC13 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC13 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC13 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC13 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC13 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC14 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC14 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC14 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC14 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC14 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC14 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC15 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC15 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC15 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC15 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC15 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC15 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC16 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC16 ENABLE= 1 / Enable ADC Board (0/1)

```

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	64 of 71

```

HIERARCH ESO DET IRACE ADC16 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC16 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC16 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC16 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC2 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC2 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC2 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC2 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC2 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC2 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC3 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC3 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC3 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC3 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC3 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC3 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC4 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC4 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC4 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC4 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC4 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC4 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC5 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC5 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC5 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC5 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC5 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC5 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC6 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC6 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC6 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC6 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC6 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC6 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC7 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC7 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC7 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC7 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC7 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC7 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC8 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC8 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC8 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC8 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC8 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC8 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE ADC9 DELAY= 7 / ADC Delay Adjustment
HIERARCH ESO DET IRACE ADC9 ENABLE= 1 / Enable ADC Board (0/1)
HIERARCH ESO DET IRACE ADC9 FILTER1= 0 / ADC Filter1 Adjustment
HIERARCH ESO DET IRACE ADC9 FILTER2= 0 / ADC Filter2 Adjustment
HIERARCH ESO DET IRACE ADC9 HEADER= 1 / Header of ADC Board
HIERARCH ESO DET IRACE ADC9 NAME= 'VISTA-AQ-GRP' / Name for ADC Board
HIERARCH ESO DET IRACE SEQCONT= 'F' / Sequencer Continuous Mode
HIERARCH ESO DET MINDIT = 1.0011000 / Minimum DIT
HIERARCH ESO DET MODE NAME = '' / DCS Detector Mode
HIERARCH ESO DET NCORRS = 2 / Read-Out Mode
HIERARCH ESO DET NCORRS NAME = 'Double' / Read-Out Mode Name
HIERARCH ESO DET NDIT = 1 / # of Sub-Integrations
HIERARCH ESO DET NDITSKIP = 0 / DITs skipped at 1st.INT
HIERARCH ESO DET RSPEED = 1 / Read-Speed Factor
HIERARCH ESO DET RSPEEDADD = 0 / Read-Speed Add
HIERARCH ESO DET VOLT1 CLKHI1= 4.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI10= 4.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI11= 4.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI12= 5.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI13= 1.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI14= 4.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI15= 0.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI16= 2.5000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI2= 4.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI3= 4.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI4= 5.0000 / Set Value High-Clock
HIERARCH ESO DET VOLT1 CLKHI5= 1.0000 / Set Value High-Clock

```



<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	65 of 71

HIERARCH ESO DET VOLT1 CLKHI6= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHI7= 0.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHI8= 2.5000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHI9= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM1= 'clk1Hi pmc' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM10= 'clk10Hi FrameStart' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM11= 'clk11Hi UcResetEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM12= 'clk12Hi VHiRowEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM13= 'clk13Hi VLoRowEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM14= 'clk14Hi VHiReset' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM15= 'clk15Hi VLoReset' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM16= 'clk16Hi VpOut' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM2= 'clk2Hi FrameStart' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM3= 'clk3Hi UcResetEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM4= 'clk4Hi VHiRowEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM5= 'clk5Hi VLoRowEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM6= 'clk6Hi VHiReset' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM7= 'clk7Hi VLoReset' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM8= 'clk8Hi VpOut' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHINM9= 'clk9Hi pmc' / Name of High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT1= 4.0283 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT10= 4.0234 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT11= 4.0234 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT12= 5.0244 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT13= 1.0352 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT14= 4.0283 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT15= 0.0439 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT16= 2.5293 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT2= 4.0283 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT3= 4.0283 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT4= 5.0195 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT5= 1.0352 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT6= 4.0332 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT7= 0.0439 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT8= 2.5293 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKHIT9= 4.0430 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT1 CLKLO1= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO10= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO11= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO12= 5.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO13= 1.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO14= 4.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO15= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO16= 9.7500 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO2= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO3= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO4= 5.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO5= 1.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO6= 4.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO7= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO8= 9.7500 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLO9= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM1= 'clk1Lo pmc' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM10= 'clk10Lo FrameStart' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM11= 'clk11Lo UcResetEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM12= 'clk12Lo VHiRowEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM13= 'clk13Lo VLoRowEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM14= 'clk14Lo VHiReset' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM15= 'clk15Lo VLoReset' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM16= 'clk16Lo VpOut' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM2= 'clk2Lo FrameStart' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM3= 'clk3Lo UcResetEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM4= 'clk4Lo VHiRowEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM5= 'clk5Lo VLoRowEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM6= 'clk6Lo VHiReset' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM7= 'clk7Lo VLoReset' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM8= 'clk8Lo VpOut' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLONM9= 'clk9Lo pmc' / Name of Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT1= 0.0391 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT10= 0.0391 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT11= 0.0439 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT12= 4.9609 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT13= 1.0254 / Tel Value Low-Clock

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	66 of 71

HIERARCH ESO DET VOLT1 CLKLOT14= 4.0283 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT15= 0.0342 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT16= 9.4824 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT2= 0.0391 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT3= 0.0293 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT4= 4.9609 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT5= 1.0303 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT6= 4.0234 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT7= 0.0342 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT8= 9.4775 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 CLKLOT9= 0.0439 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT1 DC1 = -2.3600 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC10 = -3.3500 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC11 = 0.0000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC12 = 0.7000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC13 = 0.7000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC14 = 3.5000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC15 = 2.2000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC16 = 3.3000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC2 = -3.3500 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC3 = 0.0000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC4 = 0.7000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC5 = 0.7000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC6 = 3.5000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC7 = 2.2000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC8 = 3.3000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DC9 = -2.3600 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT1 DCNM1 = 'DC1 VIdle' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM10= 'DC10 VSlew' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM11= 'DC11 VRstUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM12= 'DC12 VDetCom' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM13= 'DC13 VnUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM14= 'DC14 VpUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM15= 'DC15 VnOut' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM16= 'DC16 RefBias' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM2 = 'DC2 VSlew' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM3 = 'DC3 VRstUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM4 = 'DC4 VDetCom' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM5 = 'DC5 VnUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM6 = 'DC6 VpUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM7 = 'DC7 VnOut' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM8 = 'DC8 RefBias' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCNM9 = 'DC9 VIdle' / Name of DC-voltage  
 HIERARCH ESO DET VOLT1 DCTA1 = -2.3633 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA10= -3.3594 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA11= 0.0000 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA12= 0.7031 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA13= 0.7031 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA14= 3.5010 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA15= 2.1973 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA16= 3.3008 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA2 = -3.3545 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA3 = 0.0049 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA4 = 0.6982 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA5 = 0.6982 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA6 = 3.5010 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA7 = 2.1973 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA8 = 3.2959 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTA9 = -2.3682 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT1 DCTB1 = -2.3535 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB10= -3.3203 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB11= 0.0000 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB12= 0.6982 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB13= 0.7031 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB14= 3.5010 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB15= 2.1826 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB16= 3.2959 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB2 = -3.3154 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB3 = 0.0000 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB4 = 0.6982 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB5 = 0.6982 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB6 = 3.4961 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB7 = 2.1826 / Tel Value 2 for DC

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	67 of 71

HIERARCH ESO DET VOLT1 DCTB8 = 3.2959 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT1 DCTB9 = -2.3584 / Tel Value 2 for DC  
 HIERARCH ESO DET VOLT2 CLKHI1= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI10= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI11= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI12= 5.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI13= 1.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI14= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI15= 0.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI16= 2.5000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI2= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI3= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI4= 5.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI5= 1.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI6= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI7= 0.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI8= 2.5000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHI9= 4.0000 / Set Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM1= 'clk1Hi pmc' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM10= 'clk10Hi FrameStart' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM11= 'clk11Hi UcResetEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM12= 'clk12Hi VHiRowEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM13= 'clk13Hi VLoRowEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM14= 'clk14Hi VHiReset' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM15= 'clk15Hi VLoReset' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM16= 'clk16Hi VpOut' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM2= 'clk2Hi FrameStart' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM3= 'clk3Hi UcResetEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM4= 'clk4Hi VHiRowEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM5= 'clk5Hi VLoRowEnable' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM6= 'clk6Hi VHiReset' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM7= 'clk7Hi VLoReset' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM8= 'clk8Hi VpOut' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHINM9= 'clk9Hi pmc' / Name of High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT1= 4.0283 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT10= 4.0234 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT11= 4.0186 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT12= 5.0098 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT13= 1.0400 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT14= 4.0283 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT15= 0.0488 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT16= 2.5342 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT2= 4.0234 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT3= 4.0283 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT4= 5.0195 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT5= 1.0352 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT6= 4.0283 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT7= 0.0488 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT8= 2.5342 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKHIT9= 4.0430 / Tel Value High-Clock  
 HIERARCH ESO DET VOLT2 CLKLO1= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO10= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO11= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO12= 5.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO13= 1.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO14= 4.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO15= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO16= 9.7500 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO2= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO3= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO4= 5.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO5= 1.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO6= 4.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO7= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO8= 9.7500 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLO9= 0.0000 / Set value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM1= 'clk1Lo pmc' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM10= 'clk10Lo FrameStart' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM11= 'clk11Lo UcResetEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM12= 'clk12Lo VHiRowEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM13= 'clk13Lo VLoRowEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM14= 'clk14Lo VHiReset' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM15= 'clk15Lo VLoReset' / Name of Low-Clock

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	68 of 71

HIERARCH ESO DET VOLT2 CLKLONM16= 'clk16Lo VpOut' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM2= 'clk2Lo FrameStart' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM3= 'clk3Lo UcResetEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM4= 'clk4Lo VHiRowEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM5= 'clk5Lo VLoRowEnable' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM6= 'clk6Lo VHiReset' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM7= 'clk7Lo VLoReset' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM8= 'clk8Lo VpOut' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLONM9= 'clk9Lo pmc' / Name of Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT1= 0.0537 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT10= 0.0488 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT11= 0.0439 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT12= 4.9512 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT13= 1.0352 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT14= 4.0234 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT15= 0.0439 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT16= 9.4678 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT2= 0.0488 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT3= 0.0488 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT4= 4.9609 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT5= 1.0449 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT6= 4.0283 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT7= 0.0488 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT8= 9.4678 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 CLKLOT9= 0.0586 / Tel Value Low-Clock  
 HIERARCH ESO DET VOLT2 DC1 = -2.3600 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC10 = -3.3500 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC11 = 0.0000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC12 = 0.7000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC13 = 0.7000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC14 = 3.5000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC15 = 2.2000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC16 = 3.3000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC2 = -3.3500 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC3 = 0.0000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC4 = 0.7000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC5 = 0.7000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC6 = 3.5000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC7 = 2.2000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC8 = 3.3000 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DC9 = -2.3600 / Set value DC-Voltage  
 HIERARCH ESO DET VOLT2 DCNM1 = 'DC1 VIdle' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM10= 'DC10 VSlew' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM11= 'DC11 VRstUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM12= 'DC12 VDetCom' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM13= 'DC13 VnUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM14= 'DC14 VpUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM15= 'DC15 VnOut' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM16= 'DC16 RefBias' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM2 = 'DC2 VSlew' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM3 = 'DC3 VRstUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM4 = 'DC4 VDetCom' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM5 = 'DC5 VnUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM6 = 'DC6 VpUc' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM7 = 'DC7 VnOut' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM8 = 'DC8 RefBias' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCNM9 = 'DC9 VIdle' / Name of DC-voltage  
 HIERARCH ESO DET VOLT2 DCTA1 = -2.3535 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA10= -3.3447 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA11= 0.0049 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA12= 0.7031 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA13= 0.7031 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA14= 3.4961 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA15= 2.1973 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA16= 3.2959 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA2 = -3.3447 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA3 = 0.0049 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA4 = 0.6982 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA5 = 0.6982 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA6 = 3.4961 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA7 = 2.1973 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA8 = 3.2959 / Tel Value 1 for DC  
 HIERARCH ESO DET VOLT2 DCTA9 = -2.3535 / Tel Value 1 for DC

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	69 of 71

```

HIERARCH ESO DET VOLT2 DCTB1 = -2.3438 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB10= -3.3057 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB11= 0.0049 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB12= 0.6982 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB13= 0.7031 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB14= 3.4912 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB15= 2.1826 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB16= 3.2910 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB2 = -3.3057 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB3 = 0.0049 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB4 = 0.6982 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB5 = 0.6982 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB6 = 3.4912 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB7 = 2.1777 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB8 = 3.2910 / Tel Value 2 for DC
HIERARCH ESO DET VOLT2 DCTB9 = -2.3438 / Tel Value 2 for DC
HIERARCH ESO DET WIN NX      = 2048 / # of Pixels in X
HIERARCH ESO DET WIN NY      = 2048 / # of Pixels in Y
HIERARCH ESO DET WIN STARTX  = 1 / Lower left X ref
HIERARCH ESO DET WIN STARTY  = 1 / Lower left Y ref
HIERARCH ESO DET WIN TYPE    = 0 / Win-Type: 0=SW/1=HW
INHERIT = T / Extension inherits primary header
PV2_1   =                1. / WCS parameter value term
PV2_2   =                0. / WCS parameter value term
PV2_3   =                42. / WCS parameter value term
PV2_4   =                0. / WCS parameter value term
PV2_5   =                0. / WCS parameter value term
END

```

---

The section between the two ENDS repeating as appropriate for the next 15 extensions.

---

Table 10-1 FITS Example Header

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	70 of 71

## Appendix A. 2MASS calibration Fields

2MASS Tile	RA(J2000)	DEC(J2000)	glon	glat•
90021	6.10619	-1.97294	107.367	-64.025•
90294	8.31622	-39.40154	318.916	-77.157•
90299	11.25260	-70.58353	303.708	-46.535•
90004	28.66074	+0.71693	154.117	-58.275•
90301	51.72678	-39.84268	244.635	-55.506•
90533	55.26392	+6.93647	179.513	-36.676•
90191	66.58918	+3.62342	190.909	-29.778•
90400	74.90247	-65.73341	276.286	-35.956•
90401	78.62001	-71.00065	282.110	-33.373•
90013	89.28447	+0.01890	206.632	-12.049•
90402	93.56589	-69.66665	279.959	-28.523•
90121	97.37444	-59.65713	268.951	-25.881•
90312	126.40319	-39.09847	257.574	-0.669•
92026	128.12790	-1.57084	226.548	21.547•
90067	132.81203	+11.84773	215.639	31.905•
90860	185.41757	-0.12034	287.009	61.828•
90867	220.24529	-0.45767	351.082	51.867•
90273	224.21932	-44.81900	325.155	12.572•
90868	225.11368	-0.65787	356.367	48.363•
90565	246.68168	+5.87185	20.521	34.698•
90009	246.80780	-24.68901	352.970	16.585•
90330	247.89420	+30.14552	50.250	42.071•
90279	267.09736	-45.42783	346.065	-8.926•
90547	282.82780	-4.27488	29.111	-1.920•
90808	285.48438	-4.48794	30.125	-4.377•
90234	307.83812	-49.64775	349.607	-36.216•
90813	310.27504	-5.06339	41.333	-26.643•
92409	330.11998	+20.84962	77.728	-26.651•
92202	331.40247	-11.07477	47.133	-47.917•
90893	349.54575	+0.54857	80.124	-54.382•
90298	356.63061	-74.50079	308.690	-41.894•
90021	6.10619	-1.97294	107.367	-64.025•
90294	8.31622	-39.40154	318.916	-77.157•
90299	11.25260	-70.58353	303.708	-46.535•
90004	28.66074	+0.71693	154.117	-58.275•
90301	51.72678	-39.84268	244.635	-55.506•
90533	55.26392	+6.93647	179.513	-36.676•
90191	66.58918	+3.62342	190.909	-29.778•
90400	74.90247	-65.73341	276.286	-35.956•
90401	78.62001	-71.00065	282.110	-33.373•
90013	89.28447	+0.01890	206.632	-12.049•
90402	93.56589	-69.66665	279.959	-28.523•
90121	97.37444	-59.65713	268.951	-25.881•
90312	126.40319	-39.09847	257.574	-0.669•
92026	128.12790	-1.57084	226.548	21.547•
90067	132.81203	+11.84773	215.639	31.905•
92397	170.45775	-13.22047	271.788	44.166•
90217	180.44070	-50.05148	294.815	12.036•
90860	185.41757	-0.12034	287.009	61.828•
90867	220.24529	-0.45767	351.082	51.867•
90273	224.21932	-44.81900	325.155	12.572•
90868	225.11368	-0.65787	356.367	48.363•
90565	246.68168	+5.87185	20.521	34.698•
90009	246.80780	-24.68901	352.970	16.585•
90330	247.89420	+30.14552	50.250	42.071•
90279	267.09736	-45.42783	346.065	-8.926•
90547	282.82780	-4.27488	29.111	-1.920•
90808	285.48438	-4.48794	30.125	-4.377•
90234	307.83812	-49.64775	349.607	-36.216•
90813	310.27504	-5.06339	41.333	-26.643•
92409	330.11998	+20.84962	77.728	-26.651•
92202	331.40247	-11.07477	47.133	-47.917•
90893	349.54575	+0.54857	80.124	-54.382•
90298	356.63061	-74.50079	308.690	-41.894•

<b>VISTA DATA FLOW SYSTEM</b>	<b>Calibration Plan</b>	Document:	VIS-SPE-IOA-20000-0002
		Date:	2006-09-28
		Issue:	1.3
		Page:	71 of 71

## 11 Index

2MASS.....	8, 30, 35	Linearization.....	24, 25
Active optics .....	12, 55, 56	Low Order Wave-Front Sensor ...	9, 11, 14, 51, 52, 53, 54, 55
Astrometric ..	14, 15, 20, 25, 34, 35, 37, 49	mesostep .....	27
Autoguider .....	11	Mesostep.....	27
Background....	9, 14, 22, 25, 26, 32, 33, 37	Microstep ..	9, 10, 14, 34, 49, 51, 52, 53
Bad pixels.....	9, 14, 25, 33	Movement.....	9, 10, 33, 34
Chips .....	10, 59	noise.....	20, 22, 24, 37
Confidence map .....	25, 26, 33, 34	Noise.....	20, 22, 24, 37
Correlated Double Sampling.....	8, 22	Observing block.....	9, 54
Crosstalk .....	28	Observing Tool ....	9, 20, 22, 23, 24, 25, 26, 27, 28, 31, 32, 33, 34, 35, 37
Dark.....	13, 22, 23, 24, 27, 42, 46	Offset ..	7, 10, 15, 32, 33, 52, 53, 54, 59
data flow.....	20	Pawprint...	7, 10, 13, 14, 15, 30, 33, 49, 51, 52, 53, 54
Data flow.....	20	Persistence .....	27
Data Flow System ..	7, 8, 12, 14, 15, 35, 56	Photometric..	14, 15, 20, 25, 27, 29, 30, 31, 34, 37, 49, 57
Detectors ....	7, 8, 10, 11, 13, 14, 15, 22, 24, 25, 26, 28	Pipeline ..	10, 13, 15, 20, 22, 23, 24, 25, 26, 27, 28, 31, 32, 33, 34, 35, 37, 38, 46, 47, 48, 49, 50, 51, 52, 54, 55, 56, 57, 59
Distortion .....	34, 35	Preset.....	10, 33, 51
Efficiency.....	14, 24	QC-0 .....	9, 37
Exposure ....	7, 9, 13, 15, 22, 23, 24, 27, 31, 33, 37, 46, 47, 51, 52, 53, 54	QC-1 .....	9
Filter.	13, 14, 15, 22, 25, 27, 29, 30, 34, 46, 47, 49, 50, 51, 52, 53, 55, 56, 57	rotator.....	14
Filter wheel .....	13, 56	Rotator .....	14
FITS8,	9, 13, 15, 22, 23, 24, 25, 26, 27, 28, 31, 32, 33, 34, 35, 37, 46, 47, 48, 49, 50, 51, 52, 54, 55, 56, 59, 69	Sampling.....	8, 30, 33, 34
flat .....	23, 24, 25, 26, 47, 48, 51, 56	Science Requirements.....	8
Flat ....	23, 24, 25, 26, 32, 47, 48, 51, 56	Sensitivity .....	30, 34
Focal plane ...	11, 12, 23, 26, 51, 52, 55, 56	Survey .....	9, 29, 70
Gain.....	23, 24, 25, 26, 31	Survey Definition Tool.....	9, 52
illumination..	23, 24, 25, 27, 46, 48, 50, 51	Telescope Control System	9, 12, 14, 53, 55, 56
Illumination..	23, 24, 25, 26, 27, 31, 46, 48, 50, 51	Templates.....	13, 15, 20, 42, 46, 49, 51, 54, 56
Instrumental signature.....	15, 20, 25	Tile.....	42, 49, 51, 53, 54
Integration.....	52, 53, 54	twilight.....	25, 26, 47, 48
Jitter....	9, 10, 14, 33, 34, 49, 51, 52, 53, 54	Twilight.....	25, 26, 47, 48
		WFCAM .....	9, 30, 57
		World-Coordinate System	9, 34, 35, 36, 59